

NORDIC SLIDING DOOR CONCEPT

S.7 INTERIOR DOORS

- SOLUTIONS FOR EVERY ROOM

S.4

WHY

CHOOSE

LIUNE DOOR?

s.51

DESIGN DOORS

– ADMIRE EXACTLY WHAT YOU ENVISIONED

S.62 FINELY CRAFTED DOOR HANDLES AND PULLS

LIUNE EMBRACES THE SPACE AND COMFORT OF MODERN LIVING

Within the walls of home everyone experiences the joys and sorrows of the own life setting – love, disappointments but also the best moments of success. Only well-designed and well- implemented spaces can withstand the feelings, time and use, keeping the room safe and comfortable. The solutions carried out professionally are also cost-effective.

Liune partition doors are created to bear life. This innovation, which was developed in 2006, emerged as a result of a vision of an outstanding architect in combination with our construction expertise. The construction industry quickly gave place to the ready-made partition wall elements developed by Liune for professional construction.

Liune's strict principle has right from the beginning been, in addition to the quick and easy installation, a high quality level of the products. The curtain-like sliding doors that slide along the surface of the wall have the sound insulation and other technical characteristics of wall decoration. However, the technically high quality integrated sliding door by Liune has good sound proofing charactheristics, while being a long-lifed and cost efficient solution that does not compromise on comfort nor style. The essential part of Liune's quality hinges on a high-quality design. Liune's partition door can serve in your home as a stunning art element.

Liune holds also the EPD environmental declaration that provides the designer and builder, in support of their solid and sustainable decisions, accurate and transparent information about a product's



carbon footprint. In addition, we have renewed our door collection that you can explore now.

Leena Lundell CEO AULIS LUNDELL OY





CONTENTS

Why choose Liune door?	4–5
■ INTERIOR DOORS	6
D1 HOPE	8
D2 STRENGTH	10
D3 MAGIC D6 MOUNTAIN	12 14
D13 WAVE	16
D16 DESIGN	18
D17 EFFECT D19 LIGHT DOOR	20 22
	22
WET AREAS AND	
SAUNA DOORS	24
D5 THEME	26
D11 HEAT	28
MIRROR- AND	
	00
GLASS DOORS	30
D4 CLASSIC	32
D7 LIGHT D8 STAR	34 36
D9 TIME	30 38
D10 REFLECT	42
ACOUSTIC DOORS	42
D18 CALM	44
DECORATION DOORS	46
D15 SURFACE	48
■ DESIGN DOORS	50
D14 MY LIUNE	52
D20 ART	54
■ LIUNE BLACK	56
D21 BLACK	58
■ LIUNE SAFE	60
D22 SAFE	61
Liune handles	62
Liune locks	64
Accessories	66
Liune automation	67 67
Liune lock and spring latch	69
Liune Door ABC	70
How to choose Liune	71 72
Liune for plumbing and furnishing	72
Delivery package	



WHY CHOOSE LIUNE DOOR?

UNIQUE AND EXCLUSIVE INSTALLATION- READY ELEMENT

- designed to be compatible with the standard partition wall depths from 70 mm up to 120 mm.

SAFETY

- leaves the doorway clear of any unnecessary objects. The door locks inside the wall and opens smoothly.

NORDIC DESIGN - high quality and durable materials. Fast and reliable deliveries!

RESPONSIBILITY – EPD environmental declaration shows that Liune is also a responsible choice.

COMPLETELY UNHINDERED PASSAGE – no thresholds.

ACOUSTICS – the sound proofing qualities of Liune doors are 30% better than that of the regular hinged door.

SPACE-SAVING – compared to the regular hinged doors Liune can save up to three square meters additional space. It's the optimal choice for any living space.

DESIGN – our stunning collection offers timeless and modern design.

DELIVERY CONTENT – complete and prepared partition door frame element, door leaf, and frames.

Residential spaces

Liune brings more space and comfort to every home. The doors are made of high-quality massive wood or safety glass. Many of our door models also include special solutions such as doors suitable for wet areas and saunas. The color chart offers shades to every taste.

Bedroom, living room, kitchen, children's room, closets, wardrobe, hallway ... You'll find a suitable one for every space!

Office spaces

Liune doors help you to optimize the use of space within all kinds of office premises and increase the comfort and elegance at the same time. The door type can be selected by the spaces' intended use. The collection contains among others trancslucent art glass doors, acoustically high-quality solid doors made of massive wood as well as automated door assemblies.

Public facilities, restaurants, studios... Manage your spaces with Liune!

Care facilities

Liune meets the needs of the health care sector perfectly. The doorway is free of a threshold and since the door slides inside the wall it leaves the passage completely unhindered. Remote control or motion sensor operated doors increase the accessibility even further. The doors can also be equipped with locks and the height of the door handle can be ordered on request as desired.

Senior living, retirement homes and nursing homes.... Move freely with Liune!

Liune frees passageway down the lobby or hallway and provides more squares for your benefit in other spaces, such as the living room and the bedroom.

LIUNE IS MORE THAN A MERE DOOR. Liune door is an accomplishment of Finnish design at its best. Patented and developed for the Nordic standards serves detailed and quality guaranteed sliding door concepts. Liune Door concept is easy to install inside the partition wall where the door leaf smoothly slides inside the wall structure. Liune doors ergonomical functions ensure that the the








door is never in the way. It can be locked to its position by lightly pushing the door leaf inside the wall structure. Liune Door concept offers every feature and element needed for a well structured sliding door system. The delivery has it all – finished welded wall frame element inside of which the partition door slides, sliding partition door leaf and pre cut door jamb covers.





Liune collection Interior doors

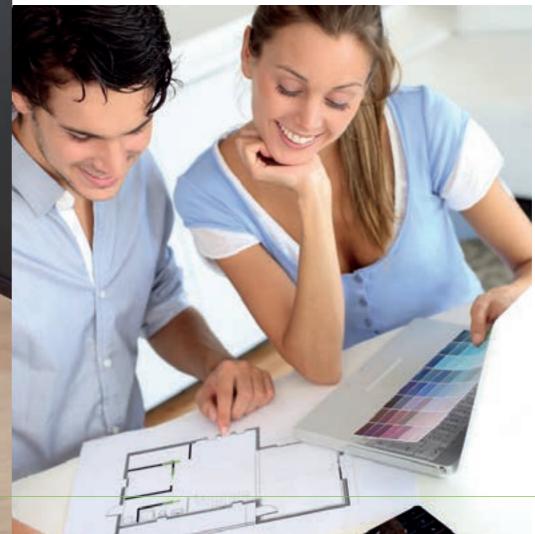





Embedded handles allow the door to slide completely into the wall.





— with Liune.

Painted Interior door

In a modern and functional space the doors are never in the way - because they slide inside the wall! Hope is a 32 mm thick MDF door, the standard color is white. However, the door color can be chosen freely according to the designers wishes.





	Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm				
	SINGLE	DOOR						
	Li07	710	1535 / 2130	1550 / 2170	731 2	060		
	Li08	810	1735 / 2130	1750 / 2170	831 2	060		
_	Li09	910	1935 / 2130	1950 / 2170	931 2	060		
шШ	Li010	1010	2135 / 2130	2150 / 2170	1031 2	060		
70-120	DOUBLE DOOR							
70-	Li014	1434	2938 / 2130	2958 / 2170	731+731 2	060		
	Li016	1634	3338 / 2130	3358 / 2170	831+831 2	060		
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2	060		
	_ Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2	060		

*) Floor installation has been taken into account with 40 mm extra height.
**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.





ACCESSORIES Handles:


Locks:


Liune standard, Luke, Line, Lyra, Luna, Aune, Laura, Leo L1, L2, L4, L7, L8 Automation feature: with a drive mechanism of your choice for 70–95 mm elements

Soft closer:

- 1. complete partitioning wall element for the door
- 2. door leaf (single or double)
- 3. abutments, handle and push latch
- 4. jamb covers
- 5. the screws for plasterboards and jamb covers
- 6. space for electrical conduit for electrical installations
- in 95 mm and 120 mm elements
- 7. installation guide













	Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm		eight			
	SINGLE	DOOR							
	Li07	710	1535 / 2130	1550 / 2170	731	2060			
	Li08	810	1735 / 2130	1750 / 2170	831	2060			
	Li09	910	1935 / 2130	1950 / 2170	931	2060			
_	Li010	1010	2135 / 2130	2150 / 2170	1031	2060			
E	Li012	1210	2535 / 2130	2550 / 2170	1231	2060			
70–120 mm	DOUBLE DOOR								
-02	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060			
	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060			
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060			
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060			
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060			

*) Floor installation has been taken into account with 40 mm extra height **) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



Live your life to the fullest! The laminate is a scratch-resistant alternative for spaces with a lot of wear and tear, such as public premises, hospices or boarding kennels, all of which are ideal objects for the Strength Door. The Strength Door with its beautiful shade of white

L		
L		

ACCESSORIES Handles:

Soft closer:


Locks:

Liune standard, Luke, Line, Leo, Aune, Laura Lyra and Luna 95/120 frame L1, L2 (L4 only for 95/120 frame) Automation feature: with a drive mechanism of your choice for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations
- in 95 mm and 120 mm elements
- 6. installation guide








Silence as a standard. The inspiration for Liune's most popular door model comes from accessibility, comfortablity and clarity. The reliable MAGIC interior door brings good sound proofing qualities and functionality to every home without sacrificing the beauty. The solid painted interior MDF door is the superior choice due to its strength and durability.





		Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm	g Door I width x I mm	neight
		SINGLE	DOOR				
		Li06	610	1335 / 2130	1350 / 2170	631	2060
		Li07	710	1535 / 2130	1550 / 2170	731	2060
		Li08	810	1735 / 2130	1750 / 2170	831	2060
	ء	Li09	910	1935 / 2130	1950 / 2170	931	2060
	m	Li010	1010	2135 / 2130	2150 / 2170	1031	2060
	70-120	Li012	1210	2535 / 2130	2550 / 2170	1231	2060
	5	DOUBL	E DOOR				
		Li010	1034	2138 / 2130	2158 / 2170	531+531	2060
		Li012	1234	2538 / 2130	2558 / 2170	631+631	2060
		Li014	1434	2938 / 2130	2958 / 2170	731+731	2060
	ء	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060
	mm	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060
	120	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060
	95-120	Li022	2234	4538 / 2130	4558 / 2170	1131+1131	2060
	_						

*) Floor installation has been taken into account with 40 mm extra height.
**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

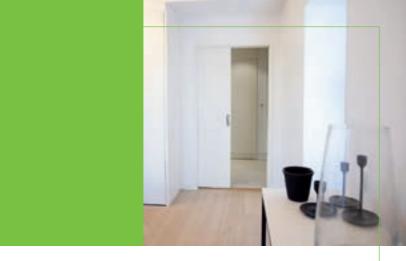

ł		

ACCESSORIES Handles:

Locks:

Liune standard, Luke, Line, Leo, Aune, Laura Lyra and Luna 95/120 frame L1, L2 (L4 only for 95-120 frame) Automation feature: with a drive mechanism of your choice for 70–95 mm elements

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover

Soft closer:

- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations
- in 95 mm and 120 mm elements
- 6. installation guide



D6 OAK VENEER DOOR



MDF Oak veneer Smooth and safe. Oak brings warmth to your home. The multi-functional white door jamb covers come as standard. An alternative option are the oak veneer jamb covers to match the Mountain Door oak veneer leafs. The embedded handles allow the door to slide completely inside the wall.






	Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm		eight		
	SINGLE	DOOR						
	Li06	610	1335 / 2130	1350 / 2170	631	2060		
	Li07	710	1535 / 2130	1550 / 2170	731	2060		
	Li08	810	1735 / 2130	1750 / 2170	831	2060		
	Li09	910	1935 / 2130	1950 / 2170	931	2060		
E	Li010	1010	2135 / 2130	2150 / 2170	1031	2060		
ш 0	Li012	1210	2535 / 2130	2550 / 2170	1231	2060		
70–120 mm	DOUBLE DOOR							
70	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060		
	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060		
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060		
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060		
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060		
	Li022	2234	4538 / 2130	4558 / 2170	1131+1131	2060		

*) Floor installation has been taken into account with 40 mm extra height

Y root instantion has been taken into account with 40 min extra height.
 **) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.
 It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

e

Liune is suitable for both new constructions and renovated buildings.








Liune standard, Luke, Line, Leo, Lyra, Luna, Aune, Laura L1, L2, L4 Automation feature: with a drive mechanism of your choice for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide



SIGN MADE



Stylish and warm. Wood veneers are popular interior materials and Liune WAVE doors are largely used in residential projects, but also in hotel and office projects. Each wood veneer door is unique as each tree is unique. Wood veneers are a natural product and Liune WAVE adds warmth and comfort to every space. Liune WAVE wood veneer options are birch, nut and pine.





	Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm		eight		
	SINGLE	DOOR						
	Li06	610	1335 / 2130	1350 / 2170	631	2060		
	Li07	710	1535 / 2130	1550 / 2170	731	2060		
	Li08	810	1735 / 2130	1750 / 2170	831	2060		
	Li09	910	1935 / 2130	1950 / 2170	931	2060		
	Li010	1010	2135 / 2130	2150 / 2170	1031	2060		
ШШ	Li012	1210	2535 / 2130	2550 / 2170	1231	2060		
20 r	DOUBLE DOOR							
70-120	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060		
~	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060		
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060		
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060		
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060		
	Li022	2234	4538 / 2130	4558 / 2170	1131+1131	2060		

*) Floor installation has been taken into account with 40 mm extra height.
 **) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.





ı.		
r		
L		

ACCESSORIES Handles:


Locks:

Liune standard, Luke, Line, Leo, Lyra, Luna, Aune, Laura L1, L2, L4 Automation feature: with a drive mechanism of your choice for 70–95 mm elements

Soft closer:

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation quide





Elegant and fresh. Our new collection of extra high DESIGN Doors comes with the standard heights 2300, 2400, 2500 and 2600 mm. The door color is fresh white and the surface is milled with details to bring it the extra look. The door can also be ordered with a smooth surface. The jamb covers come in the same color as the high DESIGN Door. Extra high doors are also available for the door models D1–D21, contact us at: sales@liune.fi.



DOOR OPTIONS

 horizontal milled • vertical milled

	Door	Door		Installation openin	g Door I	
	size	opening**	width x height	width x height*	width x h	
		mm	mm	mm	mm	
	SINGLE	DOOR				
	Li08	810	1735 / 2380	1750 / 2420	831	2310
			1735 / 2480	1750 / 2520		2410
			1735 / 2580	1750 / 2620		2510
			1735 / 2680	1750 / 2720		2610
	Li09	910	1935 / 2380	1950 / 2420	931	2310
			1935 / 2480	1950 / 2520		2410
			1935 / 2580	1950 / 2620		2510
			1935 / 2680	1950 / 2720		2610
	Li010	1010	2135 / 2380	2150 / 2420	1031	2310
			2135 / 2480	2150 / 2520		2410
_			2135 / 2580	2150 / 2620		2510
шш			2135 / 2680	2150 / 2720		2610
70–120 mm	DOUBL	E DOOR				
0	Li016	1634	3338 / 2380	3358 / 2420	831+831	2310
			3338 / 2480	3358 / 2520		2410
			3338 / 2580	3358 / 2620		2510
			3338 / 2680	3358 / 2720		2610
	Li018	1834	3738 / 2380	3758 / 2420	931+931	2310
			3738 / 2480	3758 / 2520		2410
			3738 / 2580	3758 / 2620		2510
			3738 / 2680	3758 / 2720		2610
	Li020	2034	4138 / 2380	4158 / 2420	1031+1031	2310
			4138 / 2480	4158 / 2520		2410
			4138 / 2580	4158 / 2620		2510
			4138 / 2680	4158 / 2720		2610
*)	Floor install	lation has been take	n into account with 40	mm extra height		

From instantiation has been taken into account with 40 min Akia height.
**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.
It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm

DIG DOOR EXTRA HIGH DOOR





ACCESSORIES Handles:

Locks:

Liune standard, Luke, Line, Leo, Aune, Laura Lyra and Luna 95/120 frame L1, L2 (L4 only for 95/120 frame) Automation feature: with a drive mechanism of your choice

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide





Chipboard Melamine

Liune's melamine door EFFECT is a cost-efficient solution, since it consists of fewer surface layers than the laminated doors. It is still a durable and sturdy door with a chipboard as the core layer.





	Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm		eight		
	SINGLE	DOOR						
	Li06	610	1335 / 2130	1350 / 2170	631	2060		
	Li07	710	1535 / 2130	1550 / 2170	731	2060		
	Li08	810	1735 / 2130	1750 / 2170	831	2060		
	Li09	910	1935 / 2130	1950 / 2170	931	2060		
	Li010	1010	2135 / 2130	2150 / 2170	1031	2060		
_	Li012	1210	2535 / 2130	2550 / 2170	1231	2060		
70 mm	DOUBLE DOOR							
20	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060		
	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060		
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060		
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060		
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060		

*) Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

20



When you need a durable and long-lasting door leaf.

ł		

ACCESSORIES Handles:

Locks:

Liune standard, Luke, Line, Leo, Aune, Laura L1, L2 Automation feature: with a drive mechanism of your choice for 70–95 mm elements


Soft closer:

- 1. complete partitioning wall element for the door (element contains a lower and upper guides)
- 2. the door (abutments and fitting are pre-installed) 3. jamp cover
- 4. the screws for plasterboards and jamp cover
- 5. space for electrical conduit for electrical installations
- in 95 mm and 120 mm elements 6. installation guide










The latest addition to Liune is the DOOR40 collection. The light weight contributes to the cost-efficiency and the high-quality steel frame provides functionality to any space. Take also a look at our superb jamb cover options on page 65.





	Door size	Door opening** mm	Elements width x height mm	Installation openir width x height* mm	ig Door le width x h mm	eight
	SINGLE	DOOR				
	Li07	710	1535 / 2130	1550 / 2170	731	2040
	Li08	810	1735 / 2130	1750 / 2170	831	2040
	Li09	910	1935 / 2130	1950 / 2170	931	2040
mm	Li010	1010	2135 / 2130	2150 / 2170	1031	2040
20 n	DOUBL	E DOOR				
70-120	Li014	1434	2938 / 2130	2958 / 2170	731+731	2040
~	Li016	1634	3338 / 2130	3358 / 2170	831+831	2040
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2040
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2040

*) Floor installation has been taken into account with 40 mm extra height.






ACCESSORIES Handles: Soft closer

Liune standard


- 1. complete partitioning wall element for the door
- 2. door leaf (single or double)
- 3. abutments, handle and push latch
- 4. jamb cover
- 5. the screws for plasterboards and jamb cover
- 6. space for electrical conduit for electrical installations in 95 mm elements
- 7. installation guide









Wet areas and sauna doors

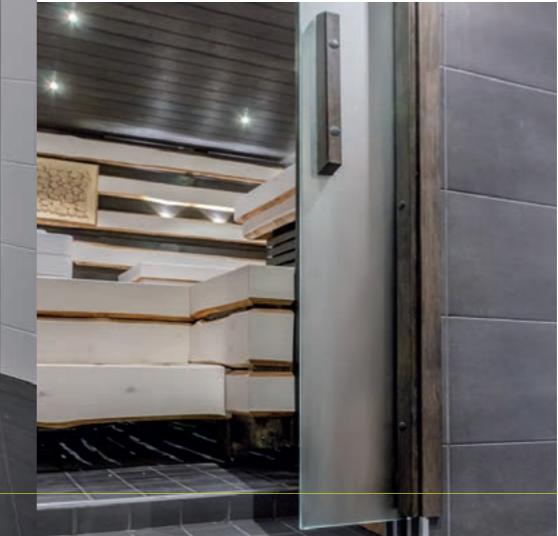

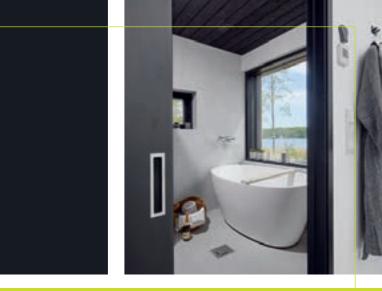



The door materials of Liune have been carefully selected taking the level of usage in homes into account.

D5 MOIST RESISTANT DOOR



Glass doors are optimal for wet areas.

Moistureresistant paint MDF

Daily routines – here we come! Laundry days, cleaning and morning routines run smoothly in the right environment. Liune doors are never in the way, which means that you can freely place the washing machine, cabinets and other utility room accessories wherever you want. Liune's D5 THEME is also perfectly suited for bathrooms and all other wet areas. THEME's jamb covers are also moisture resistant.





	Door size	Door opening** mm	Elements width x height mm	Installation openii width x height* mm	
	SINGLE	DOOR			
	Li06	610	1335 / 2130	1350 / 2170	631 2060
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
E	Li09	910	1935 / 2130	1950 / 2170	931 2060
m	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
70-120 mm	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
70-	DOUBL	E DOOR			
	Li010	1034	2138 / 2130	2158 / 2170	531+531 2060
	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
E	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
Ē	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
95–120 mm	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060
95-	Li022	2234	4538 / 2130	4558 / 2170	1131+1131 2060

*) Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm

10.00









ACCESSORIES	
Handles	

Locks:

Soft closer:

Liune standard, Luke, Line, Leo, Aune, Laura Lyra and Luna 95/120 frame L1, L2 (L4 only for 95/120 frame) Automation feature: with a drive mechanism of your choice for 70–95 mm elements

- 1. complete partitioning wall element for the door (element contains a lower and upper guides)
- 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation quide





Unprocessed Glass, wood Opal Wood

Forget crowding and waiting! Create your own unique sauna with Liune. A modern and space saving solution for bathrooms and spa facilities with a sauna. Liune's HEAT sauna door comes with a beautiful crafted wooden handle.



DOOR OPTIONS

Glass: Wood:

opal, bright, dark smoke birch veneered unprocessed wood

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:


- 1. complete partitioning wall element for the door
- (element contains a lower and upper guides) 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover
- 4. the screws for plasterboards and jamb cover 5. space for electrical conduit for electrical installations
- in 95 mm and 120 mm elements
- 6. installation guide



шШ

120

95-1

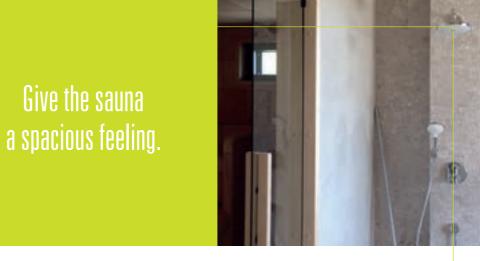



	Door size	Door opening** mm	Elements width x height mm	Installation opening width x height* mm	Door leaf width x height mm/glass
	Li07	610	1535 / 2130	1550 / 2170	831 1960
	Li08	710	1735 / 2130	1750 / 2170	931 1960
	Li09	810	1935 / 2130	1950 / 2170	1031 1960
	Li010	910	2135 / 2130	2150 / 2170	1131 1960
5	Li011	1010	2335 / 2130	2350 / 2170	1231 1960
	Li012	1110	2535 / 2130	2550 / 2170	1331 1960


*) Floor installation has been taken into account with 40 mm extra height. **) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

Door opening** mm	Elements width x height mm	Installation opening width x height* mm	Door leaf width x height mm/ wood		
710	1735 / 2130	1750 / 2170	931 1960		
810	1935 / 2130	1950 / 2170	1031 1960		
910	2135 / 2130	2150 / 2170	1131 1960		
1010	2335 / 2130	2350 / 2170	1231 1960		
	opening** mm 710 810 910	opening** width x height mm 710 1735 / 2130 810 1935 / 2130 910 2135 / 2130	opening** width x height mm width x height mm 710 1735 / 2130 1750 / 2170 810 1935 / 2130 1950 / 2170 910 2135 / 2130 2150 / 2170		

*) Floor installation has been taken into account with 40 mm extra height. **) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.








MIRROR- AND GLASS DOORS | LIUNE

e **D4 MILLED MIRROR DOOR**



Timeless architecture.




Traditional ambiance or modern nuance? The milled panel door by Liune can be delivered to the customer with the desired panel option. The white colour creates a clean, pure and safe atmosphere and fits with all kinds of interiors.





Door size	Door opening** mm	Elements I width x height mm	nstallation opening width x height* mm	g Door I width x h mm	neight	DOOR OPTIONS Traditional Classic, Style Classic, Country House Classic
_ <mark>Singli</mark> Li06	E DOOR 610	1335 / 2130	1350 / 2170	631	2060	ACCESSORIES
Li07 Li08	710 810	1535 / 2130 1735 / 2130	1550 / 2170 1750 / 2170	731 831	2060 2060	Handles: Liune standard, Luke, Line, Leo, Aune, Laura
Li09 Li010	910 1010	1935 / 2130 2135 / 2130	1950 / 2170 2150 / 2170	931 1031	2060 2060	Lyra and Luna 95/120 frame Locks: L1, L2 (L4 only for 95/120 frame) Automation feature: with a drive mechanism of
Li012	1210 E DOOR	2535 / 2130	2550 / 2170	1231	2060	your choice
Li010 Li012	1034 1234	2138 / 2130 2538 / 2130	2158 / 2170 2558 / 2170	531+531 631+631		Soft closer: for 70–95 mm elements
Li012 Li014	1434	2938 / 2130 3338 / 2130	2958 / 2170 3358 / 2170	731+731 831+831	2060	THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED
Li018 Li020	1834 2034	3738 / 2130 4138 / 2130	3758 / 2170	931+931 1031+1031	2060	WITH THE PARTITION WALL: 1. complete partitioning wall element for the door
Li020	2034	4538 / 2130		1131+1131		(element contains a lower and upper guides)
*) With embe	dded handles the d gain by pushing ligh		nm extra height. cealed by sliding it into the or leaf. Prodtruding door ha		he door	 2. the door (abutments and fitting are pre-installed) 3. jamp cover 4. the screws for plasterboards and jamp cover 5. space for electrical conduit for electrical installation in 95 mm and 120 mm elements 6. installation quide





Country House Classic



Light, warmth and ease are the things that make a cosy home and a pleasant everyday life. A home built for functionality with beautiful details makes a captivating ensemble that gives energy to the everyday life. Play with the colors or enjoy a pure and bright white Liune LIGHT door that is easy to combine and match to any color in the interior decor. The number of light openings is optional, but the most common choice is 10- and 12-vented doors.




Glass

Painted



	[
	Door	Door		stallation opening			DOOR OPTIONS	
	size	opening** mm	width x height width x height	width x height* mm	width x he mm	eight	Glass:	bright and opal
	SINGLE	DOOR					ACCESSORIES	
	Li07	710	1535 / 2130	1550 / 2170		2060	Handles:	Liune standard, Luke, Line, Leo, Aune,
	Li08 Li09	810 910	1735 / 2130 1935 / 2130	1750 / 2170		2060 2060		Laura, Lyra, Luna
	Li09 Li010	1010	2135 / 2130	1950 / 2170 2150 / 2170		2060	Locks:	L1, L2, L4
Ē	Li010	1210	2535 / 2130	2550 / 2170		2060	Automation feature:	with a drive mechanism of vour choice
⁷ 0–120 mm		E DOOR	200072100	2000,2110		2000	Soft closer:	for 70–95 mm elements
-1	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060	SUIT CIUSEL.	101 70–95 min elements
2	Li012	1434	2938 / 2130	2958 / 2170	731+731			Y INCLUDES A COMPLETE
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060		ADY TO BE INTEGRATED
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060		
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060		
1	*) With embe	dded handles the d gain by pushing ligl	en into account with 40 m loor leaf can be fully conce htly on the side of the door	ealed by sliding it into th		ne door	2. the door (abutme 3. jamb cover	ning wall element for the door nts and fitting are pre-installed) asterboards and jamb cover





MDF

More functionality with Liune.



Glass



	Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm	ng Doorl width x h mm	eight	DOOR OPTIONS Glass:	bright, opal and smoke
	SINGLE	DOOR					ACCESSORIES	
[Li07	710	1535 / 2130	1550 / 2170	731	2060	Handles:	Liune standard, Luke, Line, Leo, Aune,
	Li08	810	1735 / 2130	1750 / 2170	831	2060		Laura, Lyra, Luna
	Li09	910	1935 / 2130	1950 / 2170	931	2060	Locks:	L1, L2, L4
	Li010	1010	2135 / 2130	2150 / 2170	1031	2060	Automation feature	with a drive mechanism of
Ш	Li012	1210	2535 / 2130	2550 / 2170	1231	2060		your choice
70-120 mm	DOUBL	E DOOR					Soft closer:	for 70–95 mm elements
5	Li012	1234	2538 /2130	2558 / 2170	631+631	2060		
	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060		RY INCLUDES A COMPLETE
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060		EADY TO BE INTEGRATED
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060	WITH THE PARTITI	UN WALL:
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060	1. complete partition	oning wall element for the door
	Li022	2234	4538 / 2130	4558 / 2170	1131+1131	2060	2. the door (abutme	ents and fitting are pre-installed)
* It) With embe	dded handles the do gain by pushing ligh		mm extra height. ncealed by sliding it into th por leaf. Prodtruding door f		he door		• • . • . • . • . • . • . • . • .

D8 GLASS AND MIRROR DOOR

A DIAL OF NOLLYWOOD




Let the light in. The beatiful three-panel glass door Liune STAR suits ideally to spacious rooms where the amount of light should be maximized. The different needs of your home can be taken into account by for example letting the light flood into the next room as well.










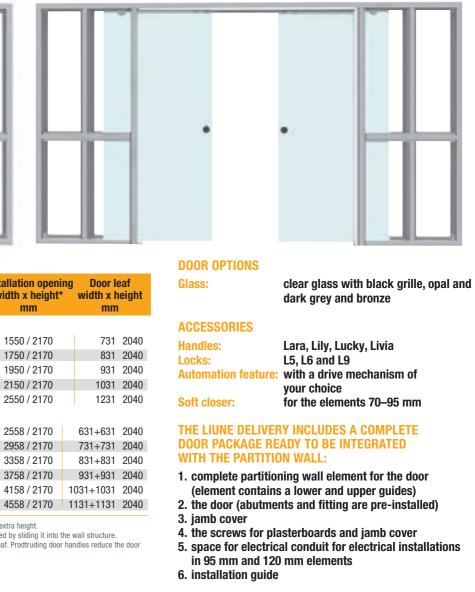

	Door size	Door opening** mm	Elements width x height mm	Installation opening width x height* mm		eigh
	SINGLI	E DOOR				
	Li07	710	1535 / 2130	1550 / 2170	731	2040
	Li08	810	1735 / 2130	1750 / 2170	831	2040
	Li09	910	1935 / 2130	1950 / 2170	931	2040
	Li010	1010	2135 / 2130	2150 / 2170	1031	2040
Ē	Li012	1210	2535 / 2130	2550 / 2170	1231	2040
70–120 mm	DOUBL	E DOOR				
Ξ	Li012	1234	2538 / 2130	2558 / 2170	631+631	2040
7	Li014	1434	2938 / 2130	2958 / 2170	731+731	2040
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2040
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2040
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2040
	Li022	2234	4538 / 2130	4558 / 2170	1131+1131	2040

*) Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm

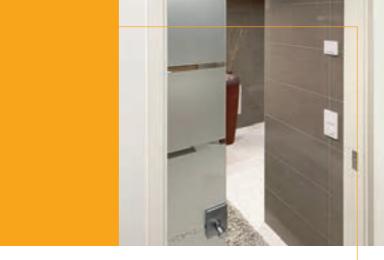

Straight and streamlined. Integrated sliding partition doors bring serenity to your home. Thanks to the embedded handles the glass doors are locked completely inside the wall structure. We recommend the use of soft closers for door closing, with a soft closer the doors close silently and safely. It is possible to order a tempered laminated safety glass for day nurseries or day-care centers. The standard Liune Door comes with a tempered safety glass.

D10 MIRROR DOOR





e

Planning and desingning your own home feels wonderful! Liune brings style to your home and adds wideness to it. Liune's REFLECT mirrored panel door creates a sensation of even more space. The mirror recess can also be filled, for example, with a white color. The handles and locks are freely selectable to match the interior decoration or to meet the needs of the space.



Painted

MDF



Reflector mirror

	Door size	Door opening** mm	Elements I width x height mm	nstallation opening width x height* mm	g Door le width x h mm	eight	DOOR OPTIONS reflector mirror, white mirror door and opal glass door
	SINGLE	DOOR					
- 1	Li07	710	1535 / 2130	1550 / 2170	731	2060	ACCESSORIES
	Li08	810	1735 / 2130	1750 / 2170	831	2060	Handles: Liune standard, Luke, Line, Leo, Aune,
	Li09	910	1935 / 2130	1950 / 2170	931	2060	Laura, Lyra, Luna
ء	Li010	1010	2135 / 2130	2150 / 2170	1031	2060	Locks: L1, L2, L4.
лш (Li012	1210	2535 / 2130	2550 / 2170	1231	2060	Automation feature: with a drive mechanism of
70–120 mm	DOUBL	E DOOR					your choice
-0-	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060	Soft closer: for 70–95 mm elements
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060	THE LIUNE DELIVERY INCLUDES A COMPLETE
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060	DOOR PACKAGE READY TO BE INTEGRATED
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060	WITH THE PARTITION WALL:
	Li022	2234	4538 / 2130	4558 / 2170	1131+1131	2060	
			en into account with 40	mm extra height.			1. complete partitioning wall element for the door (element contains a lower and upper guides)

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodruding door handles reduce the door opening by 100 mm.



Liune is a true space creator.


White mirror door

- 2. the door (abutments and fitting are pre-installed)
- 3. jamp cover
- 4. the screws for plasterboards and jamp cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide







Acoustic doors

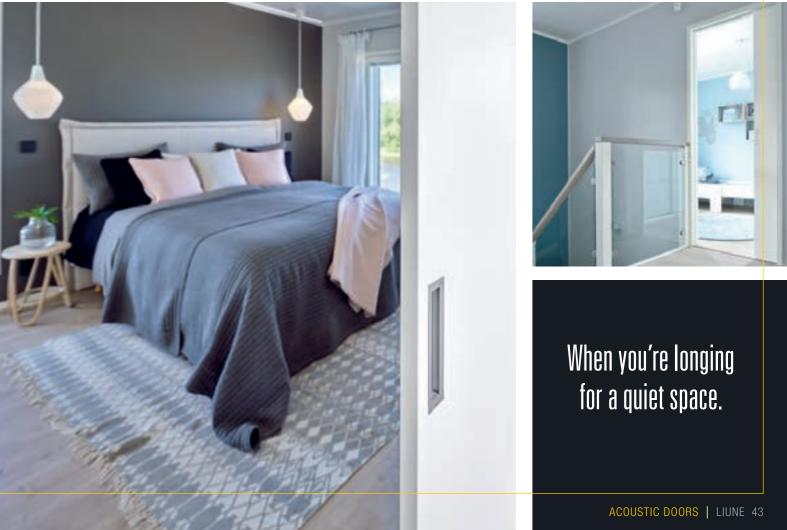

Get the sound waves under control — use Liune.







Painted db-structure

Fed up with doors that lack sound insulation? Liune doors insulate sound 30% better than the basic, unfilled swinging door. The automatic sealing threshold of Liune's CALM-door combines safety and comfort simply and unobtrusively. The beautiful white CALM-door is perfect for the discerning builder.



	Door size	Door opening** mm	Elements width x height mm	Installation op width x heig mm		width	r leaf x height 1m
	Li07	660	1535 / 2130	1550 / 2170	25	781	2060
ШШ	Li08	760	1735 / 2130	1750 / 2170	25	881	2060
95	Li09	860	1935 / 2130	1950 / 2170	25	981	2060
	Li010	960	2135 / 2130	2150 / 2170	25	1081	2060

*) Floor installation has been taken into account with 40 mm extra height.

) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm. **) Sound Insulation class 25 dB, a lab-measurement of DnT, w (dB) 32

Insulates sound effectively.



>> Sound insulation range 25 dB DnT, w (dB) 32

DOOR

The door is specially manufactured from homogenous MDF -material. When the door is closed inside the counter jamb cover, a seal treshold falls automatically from the bottom of the door leaf closing the gap between it and the floor. Speacial orders can be made with doors and jamb covers in different colors or with different plating.

DOOR JAMB COVERS

The jamb covers are speacially manufactured with sound-proofing brushes. The standard color of the jamb covers are Liune white, NCS 0502-Y (RAL 9010), as is the door leaf. The gloss level is semi-matte.

ELEMENT

After installing plasterboards, and before the installation of the door leaf, acoustic wool is installed in the wall element. The acoustic wool is included in the delivery.

ACCESSORIES

Handles:	Liune s
Locks:	No lock

standard, Luke

LIUNE SOLUTION READY FOR INSTALLATION: **INTEGRATED INTO A PARTITION WALL:**

- 1. complete partitioning wall element and wool
- 2. dB-door, fastenings, threshold and fitting as well dB-sound insulation
- 3. dB- jamb cover package
- 4. the screws and wool for plasterboards and jamp cover with brash strip
- 5. space for electrical conduit for electrical installations
- 6. installation guide and resident guidelines Insulate sound effectively





Beautiful surface for the walls.


Decoration doors







Decorative visual barriers.

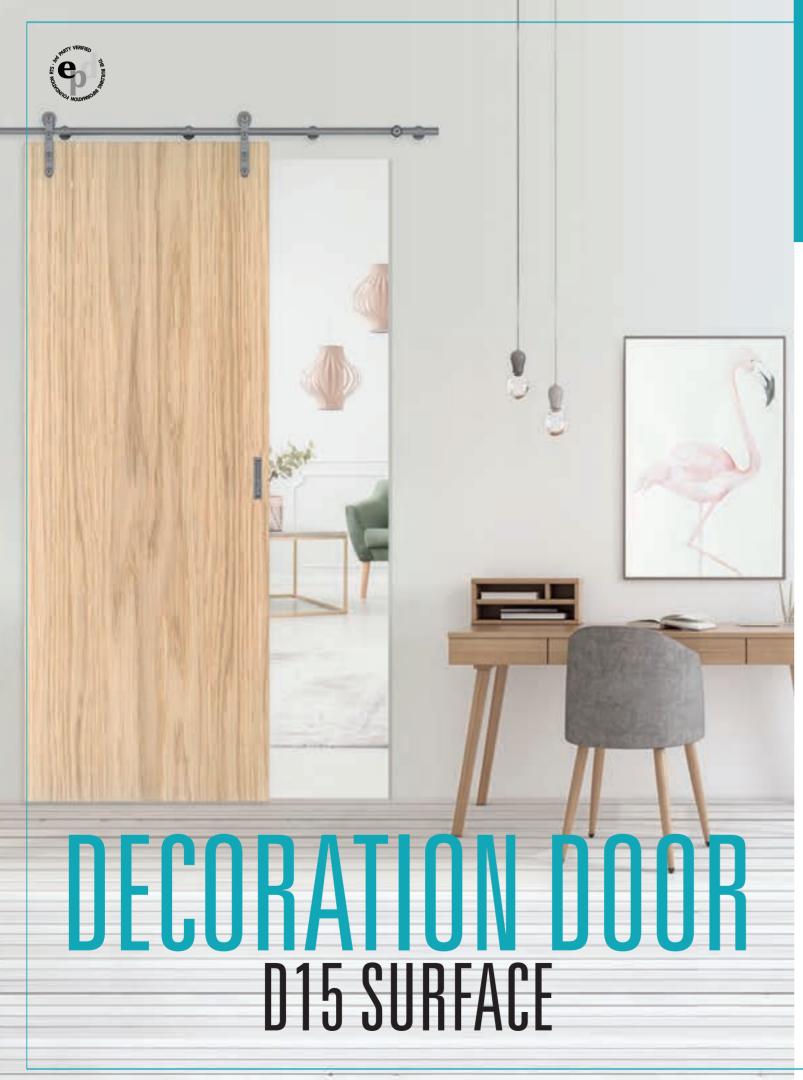



A curtain-like sliding door that you can hang on the wall. The Surface LIUNE system includes a sliding door leaf and an installation package that fits the wall perfectly. The door and the panel for the hanging package can be tinted to match your interior design plans. The material package is delivered without door frames and coverstrips. This technical implementation of Liune guarantees a beautiful and light result.

	MDF 25 mm white	 **
I		

Sliding door	Door mdf width	Door mdf height	Door mdf special higt	Door glass 1 width	Door glass height	s
Li07	780	2135	2335	780	2100	
Li08	880	2135	2335	880	2100	
Li09	980	2135	2335	980	2100	
Li010	1080	2135	2335	1080	2100	
Li011	1180	2135	2335	1180	2100	
Li012	1280	2135	2335	1280	2100	
Li013	1380	2135	2335	1380	2100	
Li014	1480	2135	2335	1480	2100	



Decoration Sliding Door

Li07

Li09

Li08

Li010

Door width mdf and glass

780

880

980

1080

Door height mdf and glass

2135

2135

2135

2135

An 8 mm **Opal Glass door** with a rail package of stainless steel.

Handles Veneer door:

Locks:

Door
Door glass pecial high
2300
2300
2300
2300
2300
2300
2300
2300

Glass door 8 mm opal

DOOR OPTIONS

white 25 mm, opal glass 8 mm

ACCESSORIES

Handles glass: Lily, Lara, Lucky Handles MDF: Liune standard Luke, Line, Leo, Laura Locks: No lock

DELIVERY CONTENT INCLUDES

- fastening package of the sliding door, white cover board
- sliding door leaf

ADDITIONAL FEATURES

• handle model in line with the article



A 40 mm natural wood veneer door with a rail package of stainless steel.

SPECIAL DOOR OPTIONS

- Loft, opal glass and wood veneer
- Handles glass: Lily, Lara, Lucky
 - Liune standard, Luke, Line, Leo, Laura no lock

DELIVERY CONTENT INCLUDES

- hanging package of the sliding door
- sliding door

ADDITIONAL FEATURES

• handle model in line with the object and the door








Select an image from our collection or order a door with your own photo.

Design doors








The image of the Magnetic Door is easy to replace.















Select a picture for your door from the amazing My Door Collection, or send us your own captured moment that you'd like to save on the door.

Changeable magnetic printed image to match your decor.



Wild and Free! Forget your old ideas about doors. This stunning Liune solution brings, not just more space, but also a new kind of freedom to the interior decoration. You can choose any image to be printed on the door, so let's get creative!



DOOR OPTIONS

Door with print D9 Magnetic print door D2 Door models used with print (special order) D1, D5, D15, D17

DATA REQUIREMENT

Data Requirement is CMYK and the image format JPG, TIFF or EPS when saving the data. Size of the image must be 1:1 in size 300 dpi that the material is printable. The image must be in door size, e.g. 931 x 2060 mm.

ACCESSORIES


Handles MDF: Locks:


Handles glass: According to the door model According to the door model According to the door model

D20 **BY JOHANNA ORAS**

The art doors by Johanna Oras a stunning novelty in the Liune Door collection. By combining everyday life and art, you can create a home that caresses the senses.







The Liune by Johanna Oras -door collection brings art to the every day life in a unique way. The deepest purpose of art is to create experiences and feelings, but art does not just have to hang on the wall, it can also be present at home in the decoration, textiles and even in suprising places.

Glass nrint Smooth surface





	size	opening** mm	width x height	width x height*	width x h	leight		
	SINGLE	DOOR						
	Li07	710	1535 / 2130	1550 / 2170	731	2060		
	Li08	810	1735 / 2130	1750 / 2170	831	2060		
	Li09	910	1935 / 2130	1950 / 2170	931	2060		
	Li010	1010	2135 / 2130	2150 / 2170	1031	2060		
mm	Li012	1210	2535 / 2130	2550 / 2170	1231	2060		
70-120	DOUBLE DOOR							
	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060		
1-	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060		
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060		
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060		
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060		

*) Floor installation has been taken into account with 40 mm extra height.
**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. t is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

54

e

"Art is honey for the soul." Johanna Oras







DOOR OPTIONS

Printed on a changeable magnetic sheet or directly on the surface of wooden or glass doors.

ACCESSORIES Handles MDF:


Locks: **Automation featu**


Liune standard, Luke, Line, Leo, Aune, Laura L1, L2 with a drive mechanism of your choice

Soft close

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed) 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide























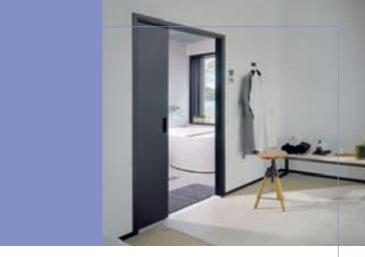

When you don't want to compromise on style. Liune's most popular door model is now available also in black. The door design ensures Liune quality by improving the accessibility and freeing the spaces. LIUNE BLACK is the high-quality and reliable choice made by the style-conscious designer. A black door, handles, fasteners



Door leaf width x heig

531+531 2060 631+631 2060 731+731 2060 831+831 2060 931+931 2060

ACCESSORIES Handles:

Locks:


Soft closer:

Liune standard, Luke, Line, Leo, Aune, Laura Lyra and Luna 95/120 runkoon L1, L2 (L4 only for 95–120 runkoon) Automation feature: with a drive mechanism of your choice for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide














	Door size	Door opening** mm	Elements width x height mm	Installation openin width x height* mm	J
	SINGLE	DOOR			
	Li07	710	1535 / 2130	1550 / 2170	731 20
	Li08	810	1735 / 2130	1750 / 2170	831 20
	Li09	910	1935 / 2130	1950 / 2170	931 20
E	Li010	1010	2135 / 2130	2150 / 2170	1031 20
70 mm	DOUBL	E DOOR			
2	Li014	1434	2938 / 2130	2958 / 2170	731+731 20
	Li016	1634	3338 / 2130	3358 / 2170	831+831 20
	Li018	1834	3738 / 2130	3758 / 2170	931+931 20
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 20

*) Floor installation has been taken into account with 40 mm extra height.

*) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

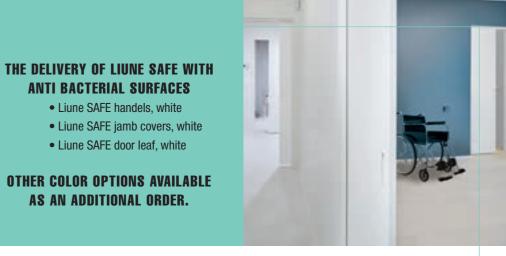

Highest quality combined with safety, LIUNE SAFE.

Liune SAFE is specially developed for premises where it is important to prevent the occurence or growth of microflora. Liune SAFE suits hospitals, health care centers, senior living facilities, kindergartens, schools, public spaces and homes, but also premises within the food industry and restaurants. The surface of Liune's SAFE door is wear resistant and the door has been designed to withstand the toughest use.

F		
g	ht	


Handles:

Locks:

Soft closer:

Liune standard, Luke, Line, Leo, Aune, Laura Lyra and Luna 95/120 frame L1, L2 (L4 only for 95–120 frame) Automation feature: with a drive mechanism of your choice for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed) 3. jamb cover
- 4. the screws for plasterboards and jamb cover
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide

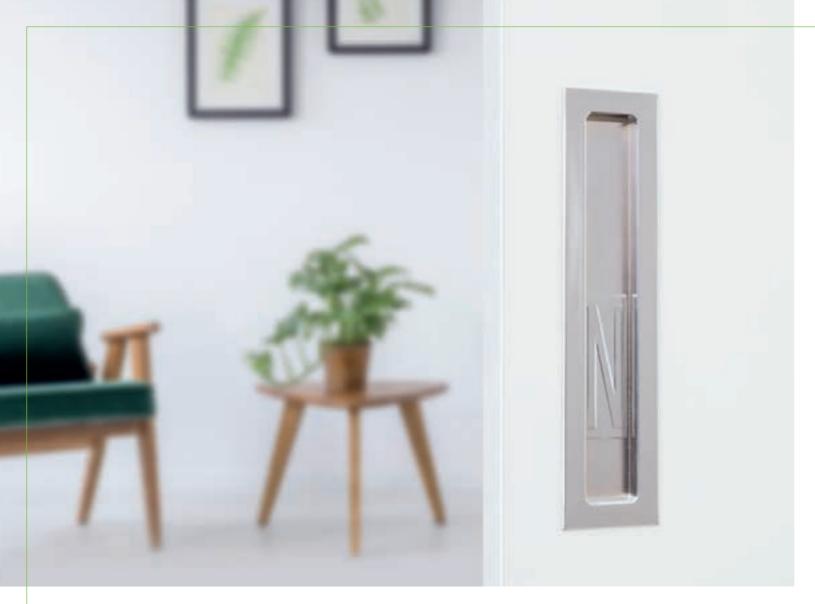

LIUNE HANDLES





The handles of the wall integrated Liune Doors are compact and beautiful. Thanks to the embedded handles Liune hides completely inside the wall and the doorway is fully at your disposal. The protruding handles in the collection remain visible, taking approx. 10 cm from the door opening.

aune	60 mm	round, chrome, matte chrome
Leo	46 mm	round, silver, gold
Livia	60 mm	glass door, silver
Lyra	60 mm	round, stainless steel





LE0



LUNA



LINE

LILY

LAURA

LIUNE SAUNA

62 LIUNE

LIUNE STANDARD

LUKE*





LUNA	50 mm	square, stainless steel
LUCKY	65 mm	round, stainless steel
LARA	60 mm	round, graphite black, stainless steel










LARA

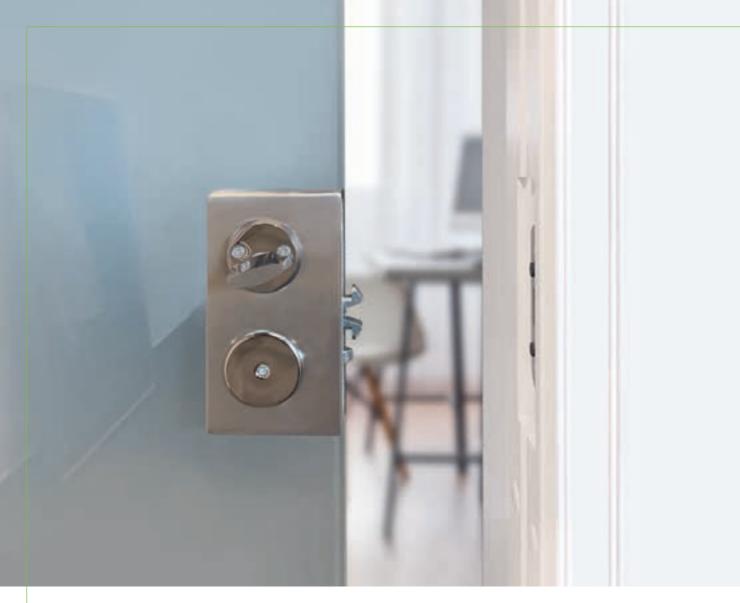

Liune creates functional spaces. The pocket doors hide inside the wall, which means that they don't require space, they provide space. Liune Doors can also be complemented with a lock from our selection of Liune locks. The lock models are compatible with both glass and solid MDF -doors, and are selectable to fit the decor or the requirements for safety.

L1, gold





L1_1, chrome

L1, silver



L4 chrome

L5



L6





L8

L2







Lock L5

Lock L6

LIUNE LOCKS			DO	ORS	
		25 mm	32 mm	40 mm	8 mm
LOCK L1_1	bathroom lock, red-green, chrome	Х			
LOCK L1	bathroom lock, red-green, silver and gold	Х			
LOCK L1 JA L1_1	With Abloy-lock body 4249			Х	
LOCK L2	white cover plate and the lock body 4960			х	
LOCK L4	Pocket door lock by Liune, chrome, to a 95 and 120 mm element	Х	х		
LOCK L4	With lock body			х	
LOCK L5	Glass door lock with a key, stainless steel				Х
LOCK L6	door lock with a knob, stainless steel				Х
LOCK L8	Magnetic lock; lock and converter for solid massive wood doors of	40 mm thick	kness,	Х	
	allows code locking or electronic key for electronic access control	(not incl.)			
LOCK L9	Abloy-lock for glass door, stainless steel				Х
LOCK L10	Liune lock BLACK for pocket door, 95 mm and 120 mm	Х	х		
LOCK 10	With lock body			х	
LOCK L11	Bathroom-lock, chrome, embedded, red-white	Х	х		
LOCK L11	With lock body			х	
LOCK L12	Liune lock for pocket door, stainless steel, to element of	Х	х		
	95 mm and 120 mm				
LOCK L12	With lock body			Х	



L9



L10

64 LIUNE



Lock L8



ACCESSORIES AND PROPERTIES


SOFT CLOSER

The soft closer softens the closing of the door by slowing down the door's movement while closing. The soft closer closes the door silently into the jamb cover of the counter frame. The soft closer is compatible with the 70 mm and 95 mm elements. The soft closer can be retrofitted to the element.



DOOR CLOSER

The door closer can be retrofitted to all doors. The door won't lock, but affixes lightly on the jamb cover of the counter frame and improves the sound technical functionality.

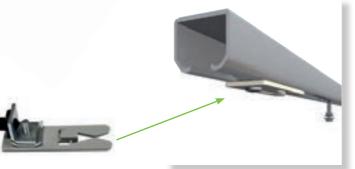

SOUND ISOLATION AND ACOUSTIC PROPERTIES OF LIUNE DOORS

LIUNE Name	Door model Door code	Material	Thickness [mm]	Wall structure Tested (T) Approximate (A)	Rw [dB]	Sound class [dB] *)not classified	70 start	ie [mm] 95 120 ing with 70+GN
Wave	D13	Massive door, veneer surface	27	Т	19	*)	Х	х
Time	D9	Glass, tempered safety glass	8	Т	17	*)	Х	Х
Black	D21	In line with the selected door	8-40	-	in accordance with the	e door *)	Х	Х
Design	D16	In line with the selected door	25-40	-	in accordance with th	e door *)	Х	Х
Reflect	D10	Massive door, mirrored surface	25	A	17	*)	Х	Х
Classic	D4	Massive door, MDF, milled, painted surface	25	А	18	*)	Х	Х
OVI40	D19	Massive door, coated	32	А	17	*)	Х	Х
Surface	D15	In line with the selected door	8–40	-	-	*)	Х	Х
Art	D20	In line with the selected door	8-40	-	in accordance with the	e door *)	Х	Х
Magic	D3	Massive door, MDF, painted	25	Т	19	*)	Х	Х
Theme	D5	Massive door, MDF, moisture treated surface	e 25	Т	19	*)	Х	Х
Effect	D17	Massive door, chipboard, melamine surface	27	Т	22	*)		Х
Норе	D1	Light massive door, MDF, painted	40	Т	19	*)		Х
Норе	D1	Massive door, painted	32	А	22	*)	Х	Х
Calm	D18	Special massive door, painted	25	Т	32	25		Х
Star	D8	Massive casing, laminated glass	25	А	17	*)	Х	Х
Light	D7	Massive casing, laminated glass	25	А	17	*)	Х	х
My Liune	D14	In line with the selected door	8–40	-	in accordance with the	e door *)	Х	Х
Strength	D2	Massive door, chipboard, laminate surface	27	Т	22	*)	Х	х
Mountain	D6	Massive door, MDF, veneer surface	27	Т	19	*)	Х	Х

The lab-tested timber door Rw 14 dB, by the traditional sliding door the sound values are not achieved at all. Tests: Helimäki Akustikot Oy (Acoustics).

AUTOMATION D12

Electrical features can be ordered for all single and double door models D1. D2. D3. D4. D9. D10. D13. D14. D17, D20, D21. Door frames can be chosen freely. Element size in the automation is always 95 mm. Liune sliding door automation empowers perfect accessibility. The sliding door is programmed to operate at constant speed to assure safety desired. All automation machinery parts are ready-installed on the door slide rail. The Liune standard automation feature is a wall-mounted pushbutton. Remote control and motion sensor mechanisms are also available.





LIUNE FRAMES

ARCHITRAVE JAMB COVERS. The jamb covers are always pre cut to fit the Liune Doors perfectly and together they create a perfect esthetic result. Choose jamb covers to fit every room by selecting the jamb cover model, material and color.

- **O LIUNE JAMB COVERS**
- **O ARCHITRAVE JAMB COVERS**
- GLASS DOOR JAMB COVERS
- VENEERED AND TINTED JAMB COVERS
- **OAK VENEER JAMB COVERS**
- SAUNA DOOR JAMB COVERS
- WET AREA JAMB COVERS
- **O DESIGN JAMB COVERS**

FREE PASSAG EWAY WITH

LOCK AND SPRING LATCH

Free passage is obtained when the door is closed 1. inside the wall. The closes by lightly pushing the edge of the door leaf at the handle height.



By pulling the handle the door moves parallel with the wall. The door opens and closes in the same manner. All Liune Door models slide completely inside the wall provided that the door is equipped with an embedded handle. The sauna doors are delivered with protruding handles.

PROPERTIES OF LIUNE, **MAINTENANCE AND USAGE**



Maintenance


No maintenance is needed for the door element. The ball bearing roller wheels are possible to replace, they are not to be lubricated or serviced. The door leaf and jamb cover surfaces can be wiped with mild, non-abrasive detergents. The door leaf can be replaced when needed without dismantling the wall by removing only the jamb covers.

Use

A Liune latch is embedded at handle height in the rear edge of all wooden doors already in the factory. The spring latch locks the door leaf inside the door element and helps the door to pop out from inside the wall when the door is closed. The Liune latch can be replaced if necessary by removing the jamb covers and the door leaf. In glass doors the Liune latch is placed on the top of the door.







LIUNE DOOR ABC

Liune Pocket Doors are easy to install both for do-it-yourself and professional builders. Follow the 5-step installation guide.





The Quick-frame element is assembled from two welded element parts. the installation is guick and easy.



3

The partition wall frame is ready the Liune element is lifted into place.





5

The element is covered with plaster boards by using the included screws. the wall surface can now be coated.

The coating is done.

install the door leaf and the iamb covers with the included screws.

THIS IS HOW YOU **CHOOSE LIUNE**

Frame Types of 70, 95 and 120 mm define the thickness of the frame structure. The size of the doorway frame type is selected on the basis of the intended use.

1. PARTITION WALL THICKNESS

Choose the element according to the frame depth 70 mm, 95 mm, or 120 mm

2. DOOR OPENING WIDTH

- **Door width (single leaf)** Li06, Li07, Li08, Li09, Li010, Li011, Li012
- **Door width (double leaf)** Li010, Li012, Li014, Li016, Li018, Li020, Li022




3A. SWING DOORS TAKE AWAY USABLE SQUARES. (3a)

3. AN INVESTMENT IN LIUNE PAYS ITSELF OFF IMMEDIATELY

It's wise to choose Liune for all the interior doors. The gained space compared to the regular swing door is approx. 3 m² per door when taking into account the saved space both on the floor and the wall. Liune is a safe choice for any premises where functionality, comfort and quality are valued!

*) In 2019 the average price per square meter of a two-room apartment in a new block of flats was € 6517 in Helsinki, Finland, Source: Statistics Finland,

The free opening for Liune size Li08 is 810 mm.

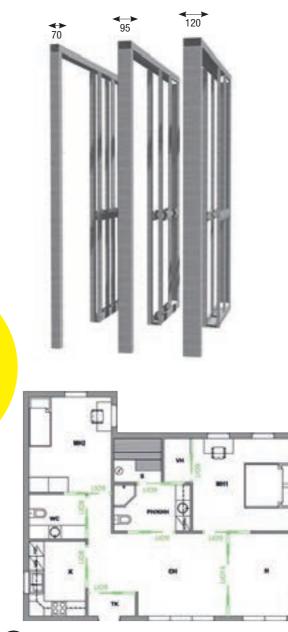




THE INTEGRATED LIUNE FREES THE ENTIRE SPACE FOR YOU TO USE.

LUNE ELEMENTS

The Liune partition door element is developed for professional builders and is the only pre-welded door element on the market. It is manufactured from CE-marked steel profiles and its indoor air quality classification is M1. Our element collection is extensive; we have designed elements to suit every particular space.

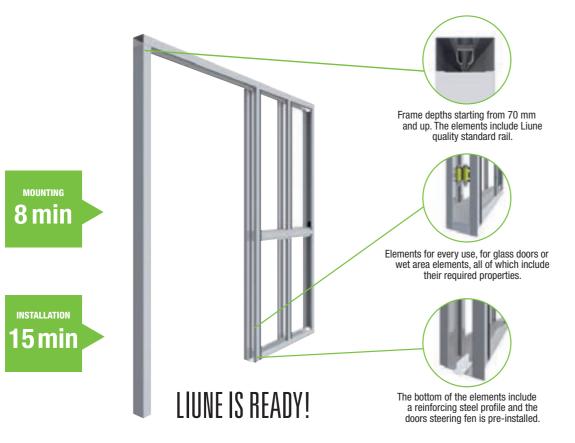

GLASS ELEMENT

SAUNA ELEMENT

standard delivery

· spaces for electrical conduit

· the element is delivered pre-welded

and assembled, and ready for installa-

tion. Only the sliding rail, door leaf and

element is solid and manufactured with

special extension pieces taking into

account the water splashes and the

hygrothermal insulation, in which

case a gutter is also included in th

· there is no perforation for eletrical con-

· element is ready assembled for instal-

or wooden door and special door

frames will need to be attached

duit taken into account in the element

lation on site and only slide rail, glass

jamb covers need to be attached on site.

LIUNE ELEMENT

- spaces for electrical conduit in standard delivery in all frame depths of 95–120 mm
- the element is delivered pre-welded and assembled, and ready for installation. Only the sliding rail, door leaf and jamb covers need to be attached on site.

ELEMENT FOR WET AREA

- spaces for electrical conduit
- wet area splash collecting runner in standard delivery
- the element is delivered pre-welded and assembled, and ready for installation. Only the sliding rail, wet area door leaf and jamb covers need to be attached on site.

RENOVATION ELEMENT

- · spaces for electrical conduit
- · renovation elements are supplied without the counter frame stud so that the space use for element installation is maximized

AUTOMATION ELEMENT

- in frame depths of 95-120 mm included in the standard delivery. Automation is switched on in connection with the other electrical work
- · all parts of sliding door mechanism are already installed to the slide rail, the element is otherwise ready assembled for installation on the site.

ELECTRICAL INSTALLATIONS

Liune's wet area element is prepared for electrical conduits already at the factory. The frame profile forms an electrical conduit tube where the cables can be installed safely.

PARTITION WALL PANELLING Boards intended for wet areas should be used in the wet room panelling according to the manufacturer's instruction. The door element can be panelled with wet area boards or cement based boards.



FURNISHING ON THE ELEMENT

Furninshing can be installed on the Liune element by using special supports. The profiles can if needed be manufactured from thicker or stronger steel. WIth Liune everything is possible.

ELEMENT INSTALLATION BLOCKS

Accessory to facilitate the installation. 15 mm blocks for laminated floors and floor tiles, and 20 mm blocks for parquet floors.

CHARACTERISTICS OF E	LECTRICAL FITTINGS FOR	VARIOUS EL
FRAME THICKNESS in mr	n DOOR in mm	PARTIT
70	25 and 32	-
95	25 and 32	Embedde
95	40	Surface s
120	25	Embedde
120	32 and 40	Embedde

LIUNE FOR PLUMBING AND FURNISHING

PLUMPING

Plumbing can also be fitted into the Liune element if the frame depth is 120 mm. The most commonly used frame depth us 95 mm.

LEMENTS AND DOORS

TION WALL SOCKET AT THE LEVEL OF ELEMENT

ed shallow sockets sockets led sockets ed shallow sockets

DELIVERY PACKAGE

The delivery package includes a pocket type sliding door element ready for installation in the partition wall. The door leaf slides into the pocket and hides completely inside the wall, saving approximately 3 m² of room and wall space per door.



SLIDING DOOR ELEMENT

Made of welded steel and ready to install, with an aluminun sliding rail on the top and a fixed steering rail on the bottom, compatible with the chosen Liune door leaf. Installation blocks can be ordered separately to facilitate the installation.



PREPARED FOR ELECTRICAL CONDUITS

The element is prepared for electrical conduits. All Liune elements can be equipped with electricity, except for the 70 mm and the unvented sauna element.



PARTITION DOOR

The door comes normally with the Liune

latch, tab and handle already attached.

The shade of the white Liune door is

NCS 0502-Y and the gloss degree is

semi gloss.

FASTENINGS

Ball bearing roller wheels and screws to fix the plaster boards to the element and to fix the door jamb covers. Frame plugs and soft seal for the door head. For door models D1 and D19 also the special fastenings and fittings.



JAMB COVERS

The jamb covers are white (NCS 0502-Y)

and the gloss degree is semigloss. The

standard dimension is always for one

plasterboard per installation side. The

INSTALLATION INSTRUCTIONS

For the element, which is installed in the wall framing stage, and the door leaf, which normally is installed in connection with the surface works.



LIUNE ELEMENT



ELEMENT FOR WET AREA



RENOVATION ELEMENT



For architects and designers: Liune GDL object can be freely downloaded to ArchiCAD, REVIT and AutoCAD objects at www.liune.fi/bim/en

74 LIUNE

There is a suitable element for each space. Choose according youre design.



GLASS ELEMENT



SAUNA ELEMENT



AUTOMATION ELEMENT



Liune element frame

We grant a 5 Year warranty for the Liune Door element. This presupposes that the installation instructions have been followed correctly and that the products are applied for home use. The warranty is valid in Scandinavia.

Warranty period

The warranty period for the element frame is valid five (5) Years from the date of purchase. The original receipt of payment is required as proof of purchase.

Warranty covers what?

The warranty covers the element frame for dry premises assembled at the factory. The designer of the object is responsible for the suitability of the use in the premises and that the Liune element is used to its intended purpose.

If problems occur

The manufacturer will examine and decide whether the detected fault is covered by the warranty or not. If the warranty coverage applies to the fault, the manufacturer repairs it. The manufacturer pays for the repair cost and the work and travel expances of the repairers, provided that the accessibility to the product does not cause any additional costs. This does not apply to repair works that the manufacturer has not authorized.

What the warranty does not cover:

The warranty does not apply if the product was defectly installed, incorrectly installed, or if the damage is caused by improper storage, inappropriate use or has been modified.

Neither does the warranty cover normal wear and tear, defects caused by accidents, shocks or blows, nor the effects of chemical reactions.

Maintenance instructions

Not to be serviced.

Installation

A defect element is not to be installed. If an element is defect, contact the manufacturer. The element is fastened when one side of the partition wall has been paneled, or to the vertical partition wall frame studs that frame the door element. The straightness of the element has to be secured. If you are uncertain about the installation, contact a professional builde

Legislation

The Buyer has rights under chapter 5 of the Consumer Production Act, which is not limited by this warranty.





Liune Door sales office: Aulis Lundell Oy Tel +358 20 7341 400 sales@liune.fi www.liune.fi/en



Aulis Lundell Oy has been certified according to the ISO 9001 quality system since 2004.



EPD No. RTS_38_19 LIUNE -door system with glass/MDF door www.liune.fi/epd/en



Aulis Lundell Oy has been operating under the environmental management system since 2004.

Liune has utility model protections in the EU, Norway and the US.