



LIUNE EMBRACES THE SPACE AND COMFORT OF MODERN LIVING

It's within the walls of home where we experience the joys and sorrows of our own life setting - the love, the disappointments, but also the best moments of success. Only well designed and well made spaces can endure emotions, time and use while remaining safe and comfortable. The solutions carried out professionally are also cost-effective.

Liune pocket doors are created to endure life. This innovation, which was developed in 2006, emerged as a result of a vision from an outstanding architect and the light-weight building expertice of Aulis Lundell Oy. The construction industry quickly adopted the prefabricated pocket door and partition wall element, which was developed by Liune for professional construction.

Liune's strict principle right from the beginning has been, in addition to the quick and easy installation, a very high quality level of the products. Liune's integrated sliding doors have good sound proofing charactheristics, while being a long-lifed and cost-efficient solution that does't compromise on comfort nor style. Liune's interior doors can now also serve in your home as stunning art elements.

Liune holds also the EPD environmental declaration that provides the designer and builder, in support of their solid and sustainable decisions, accurate and transparent information about a product's carbon footprint. In addition, we have renewed our door collection, which you can explore in this pamphlet.

Leena LundellChairman of the Board
Aulis Lundell Oy



CONTENTS

WHY CHOOSE LIUNE DOOR?	4	SPECIAL DOORS	
INTERIOR DOORS		Calm D18	36 37
Hope D1 Strength D2 Magic D3	8 9 10	DECORATION DOORS	
Mountain D6	12 13 14	Surface D15	40
Effect D17	16 17	DESIGN DOORS	
WET AREAS AND SAUNA DOOR	S	My Liune D14Art D20	44 45
Theme D5	20 21	LIUNE BLACK	
		Black D21	50
PANEL AND GLASS DOORS	21		50 52 54
PANEL AND GLASS DOORS Classic D4 Light D7	21 24 25	Black D21 Liune handles Liune locks ´ Liune covering jambs	52 54 56
PANEL AND GLASS DOORS Classic D4 Light D7 Star D8	21 24 25 26	Black D21 Liune handles Liune locks ´ Liune covering jambs Liune accessories	52 54 56 58
PANEL AND GLASS DOORS Classic D4 Light D7 Star D8 Time D9	24 25 26 28	Black D21 Liune handles Liune locks ´ Liune covering jambs Liune accessories Pop-up latch Properties of Liune	52 54 56 58 60 61
PANEL AND GLASS DOORS Classic D4 Light D7 Star D8	21 24 25 26	Black D21 Liune handles Liune locks ´ Liune covering jambs Liune accessories Pop-up latch Properties of Liune Liune Door ABC	52 54 56 58 60 61 62
PANEL AND GLASS DOORS Classic D4 Light D7 Star D8 Time D9 Reflect D10 Stripe D23 City D24	24 25 26 28 29 30 31	Black D21 Liune handles Liune locks ´ Liune covering jambs Liune accessories Pop-up latch Properties of Liune Liune Door ABC This is how you choose Liune	52 54 56 58 60 61 62 63
PANEL AND GLASS DOORS Classic D4 Light D7 Star D8 Time D9 Reflect D10 Stripe D23	24 25 26 28 29 30	Liune handles Liune locks ´ Liune covering jambs Liune accessories Pop-up latch Properties of Liune Liune Door ABC This is how you choose Liune Liune elements	52 54 56 58 60 61 62 63 64
PANEL AND GLASS DOORS Classic D4 Light D7 Star D8 Time D9 Reflect D10 Stripe D23 City D24	24 25 26 28 29 30 31	Black D21 Liune handles Liune locks ´ Liune covering jambs Liune accessories Pop-up latch Properties of Liune Liune Door ABC This is how you choose Liune	52 54 56 58 60 61 62 63

Liune Space

Doors marked with this logo can also be ordered as Liune Space hinged doors.



Brave own style

Colors strongly affect the atmosphere - Tikkurila's full color range is available as an alternative to both your doors and door frames.



#LIUNELIFE #LIUNEDOOR



WHY CHOOSE LIUNE DOOR?





LIUNE IS MORE THAN A MERE DOOR

Liune door is an accomplishment of Finnish design at its best. Patented and developed for the Nordic standards serves detailed and quality guaranteed sliding door concepts. Liune Door concept is easy to install inside the partition wall where the door leaf smoothly slides inside the wall structure. Liune doors ergonomical functions ensure



UNIQUE AND EXCLUSIVE INSTALLATION- READY ELEMENT

 designed to be compatible with the standard partition wall depths from 70 mm up to 120 mm.

SAFETY

leaves the doorway clear of any unnecessary objects.
 The door locks inside the wall and opens smoothly.
 NORDIC DESIGN – high quality and durable materials.
 Fast and reliable deliveries!

RESPONSIBILITY

 EPD environmental declaration shows that Liune is also a responsible choice.

COMPLETELY UNHINDERED PASSAGE

- no thresholds.

that the the door is never in the way. It can be locked to its position by lightly pushing the door leaf inside the wall structure. Liune Door concept offers every feature and element needed for a well structured sliding door system. The delivery has it all – finished welded wall frame element inside of which the partition door slides, sliding partition door leaf and pre cut covering jambs.



ACOUSTICS

 the sound proofing qualities of Liune doors are 30% better than that of the regular hinged door.

SPACE-SAVING

 compared to the regular hinged doors Liune can save up to three square meters additional space. It's the optimal choice for any living space.

DESIGN

 our stunning collection offers timeless and modern design.

DELIVERY CONTENT

 complete and prepared partition door frame element, door leaf, and frames.

RESIDENTIAL SPACES

Liune brings more space and comfort to every home. The doors are made of high-quality massive wood or safety glass. Many of our door models also include special solutions such as doors suitable for wet areas and saunas. The color chart offers shades to every taste.

Bedroom, living room, kitchen, children's room, closets, wardrobe, hallway...

You'll find a suitable one for every space!



Liune doors help you to optimize the use of space within all kinds of office premises and increase the comfort and elegance at the same time. The door type can be selected by the spaces' intended use. The collection contains among others trancslucent art glass doors, acoustically high-quality solid doors made of massive wood as well as automated door assemblies.

Public facilities, restaurants, studios...

Manage your spaces with Liune!



Liune meets the needs of the health care sector perfectly. The doorway is free of a threshold and since the door slides inside the wall it leaves the passage completely unhindered. Remote control or motion sensor operated doors increase the accessibility even further. The doors can also be equipped with locks and the height of the door handle can be ordered on request as desired.

Senior living, retirement homes and nursing homes....

Move freely with Liune!







Liune frees passageway down the lobby or hallway and provides more squares for your benefit in other spaces, such as the living room and the bedroom.









INTERIOR DOORS


UNE NORDIC DESIGN





HOPE D1 Interior Door





In a modern and functional space the doors are never in the way – because they slide inside the wall! Hope is a 32 mm thick MDF door, the standard color is white. However, the door color can be chosen freely according to the designers wishes.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	g Door leaf width x height mm
	SINGLE I	000R			
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
ے	Li09	910	1935 / 2130	1950 / 2170	931 2060
шш	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
120	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
ō	DOUBLE	D00R			
, 95	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
2	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

ACCESSORIES

Handles: Liune standard, Luke, Line, Lyra,

Luna, Aune, Laura, Leo

L1, L2, L4, L8, L10, L11, L12, L13

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

- complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide






^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



STRENGTH D2 Laminate Door





Live your life to the fullest! The laminate is a scratch-resistant alternative for spaces with a lot of wear and tear, such as public premises, hospices or boarding kennels, all of which are ideal objects for the Strength Door. The Strength Door with its beautiful shade of white suits all types of interior designs.





Door size	Door opening* mm	Element width x height mm	Installation openin width x heigt* mm	g Door width x mr	height
SINGLE	DOOR				
Li07	710	1535 / 2130	1550 / 2170	731	2060
Li08	810	1735 / 2130	1750 / 2170	831	2060
Li09	910	1935 / 2130	1950 / 2170	931	2060
Li010	1010	2135 / 2130	2150 / 2170	1031	2060
Li012	1210	2535 / 2130	2550 / 2170	1231	2060
DOUBLE	D00R				
Li012	1234	2538 / 2130	2558 / 2170	631+631	2060
Li014	1434	2938 / 2130	2958 / 2170	731+731	2060
Li016	1634	3338 / 2130	3358 / 2170	831+831	2060
Li018	1834	3738 / 2130	3758 / 2170	931+931	2060
Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060

*) Floor installation has been taken into account with 40 mm extra height.

70, 95 or 120 mm

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

ACCESSORIES

Handles:

Liune standard, Luke, Line, Leo, Aune, Laura, Luna, Lyra

Locks:

L1, L2, L3, L4, L10, L12, L13

Automation feature:

with a drive mechanism of your choice

Soft closer:

for 70-95 mm elements


- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- covering jambs
- 4. screws for plaster boards and covering jambs
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide





MAGIC D3 Smooth White Interior Door





Silence as a standard. The inspiration for Liune's most popular door model comes from accessibility, comfortablity and clarity. The reliable MAGIC interior door brings good sound proofing qualities and functionality to every home without sacrificing the beauty. The solid painted interior MDF door is the superior choice due to its strength and durability.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x heigt* mm	Door leaf width x height mm
	SINGLE	DOOR			
	Li06	610	1335 / 2130	1350 / 2170	631 2060
Ē	Li07	710	1535 / 2130	1550 / 2170	731 2060
or 120mm	Li08	810	1735 / 2130	1750 / 2170	831 2060
7	Li09	910	1935 / 2130	1950 / 2170	931 2060
	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
), 95	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
70,	DOUBLE	DOOR			
	Li010	1034	2138 / 2130	2158 / 2170	531+531 2060
	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
ے	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
20mm	_ Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
120	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
ō	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060
95	Li022	2234	4538 / 2130	4558 / 2170	1131+1131 2060

*) Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

ACCESSORIES

Handles: Liune standard, Luke, Line, Leo,

Aune, Laura, Lyra, Luna

Locks: L1, L2, L3, L4, L10, L12, L13

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide










MOUNTAIN D6 Wood Veneer Door





Smooth and safe. Oak brings warmth to your home. The multi-functional white covering jambs come as standard. Alternative options are the oak veneer jamb covers to match the Mountain Door oak veneer leafs. The embedded handles allow the door to slide completely inside the wall.





Door size	Door opening* mm	Element width x height mm	Installation opening width x height*	g Door leaf width x height mm
SINGLE I	000R			
Li06	610	1335 / 2130	1350 / 2170	631 2060
Li07	710	1535 / 2130	1550 / 2170	731 2060
Li08	810	1735 / 2130	1750 / 2170	831 2060
Li09	910	1935 / 2130	1950 / 2170	931 2060
Li010	1010	2135 / 2130	2150 / 2170	1031 2060
Li012	1210	2535 / 2130	2550 / 2170	1231 2060
DOUBLE	D00R			
Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060
Li022	2234	4538 / 2130	4558 / 2170	1131+1131 2060
	SINGLE I Li06 Li07 Li08 Li09 Li010 Li012 DOUBLE Li012 Li014 Li016 Li018 Li020	Size opening* mm SINGLE DOOR Li06 610 Li07 710 Li08 810 Li09 910 Li010 1010 Li012 1210 DOUBLE DOOR Li012 1234 Li014 1434 Li016 1634 Li018 1834 Li020 2034	size opening* mm width x height mm SINGLE DOOR Li06 610 1335 / 2130 Li07 710 1535 / 2130 Li08 810 1735 / 2130 Li09 910 1935 / 2130 Li010 1010 2135 / 2130 Li012 1210 2535 / 2130 DOUBLE DOOR Li012 1234 2538 / 2130 Li014 1434 2938 / 2130 Li016 1634 3338 / 2130 Li018 1834 3738 / 2130 Li020 2034 4138 / 2130	size mm opening* mm width x height mm width x height mm SINGLE DOOR Li06 610 1335 / 2130 1350 / 2170 Li07 710 1535 / 2130 1550 / 2170 Li08 810 1735 / 2130 1750 / 2170 Li09 910 1935 / 2130 1950 / 2170 Li010 1010 2135 / 2130 2150 / 2170 Li012 1210 2535 / 2130 2550 / 2170 DOUBLE DOOR Li012 1234 2538 / 2130 2558 / 2170 Li014 1434 2938 / 2130 2958 / 2170 Li016 1634 3338 / 2130 3558 / 2170 Li018 1834 3738 / 2130 3758 / 2170 Li020 2034 4138 / 2130 4158 / 2170

^{*)} Floor installation has been taken into account with 40 mm extra height.

ACCESSORIES

Handles: Liune standard, Luke, Line, Lyra,

Luna, Aune, Laura, Leo

Locks: L1, L2, L3, L4, L10, L12, L13

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide

^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



WAVE D13 **Limited Edition**





Wild and free. Liune Limited Edition is a changing collection where our carpenter custom makes all products. Door designs are unique individuals and there are no two exactly similar doors. The materials are free to select, for example wood and glass were combined in the spa door of the Pyörre house.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	Door le width x h mm	
	SINGLE	DOOR				
[— LI06	610	1335 / 2130	1350 / 2170	631	2060
	Li07	710	1535 / 2130	1550 / 2170	731	2060
	Li08	810	1735 / 2130	1750 / 2170	831	2060
	Li09	910	1935 / 2130	1950 / 2170	931	2060
_	Li010	1010	2135 / 2130	2150 / 2170	1031	2060
TIIII07	Li012	1210	2535 / 2130	2550 / 2170	1231	2060
ןַב	DOUBLE	D00R				
5	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060
င္သ	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060
	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060
	LI022	2234	4538 / 2130	4558 / 2170	1131+1131	2060
	*\ Elear installa	ation has been tal	on into account with 40	mm outro boight		

ACCESSORIES

Handles: according to the door model

Locks: according to the door model

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70-95 mm elements

- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed) 2.
- 3. covering jambs
- screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide



 ^{*)} Floor installation has been taken into account with 40 mm extra height.
 **) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



DESIGN D16 Extra High Door








Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	Door leaf width x height mm
SINGLE DO	OOR			
Li08	810	1735 / 2380	1750 / 2170	831 2310

SINULL	DUUN			
Li08	810	1735 / 2380	1750 / 2170	831 2310
		1735 / 2480	1750 / 2520	2410
		1735 / 2580	1750 / 2620	2510
		1735 / 2680	1750 / 2720	2610
Li09	910	1935 / 2380	1950 / 2420	931 2310
		1935 / 2480	1950 / 2520	2410
		1935 / 2580	1950 / 2620	2510
		1935 / 2680	1950 / 2720	2610
Li010	1010	2135 / 2380	2150 / 2420	1031 2310
		2135 / 2480	2150 / 2520	2410
		2135 / 2580	2150 / 2620	2510
		2135 / 2680	2150 / 2720	2610
DOUBLE	DOOR			
Li016	1634	3338 / 2380	3358 / 2420	831+831 2310
		3338 / 2480	3358 / 2520	2410
		3338 / 2580	3358 / 2620	2510
		3338 / 2680	3358 / 2720	2610
Li018	1834	3738 / 2380	3758 / 2420	931+931 2310
		3738 / 2480	3758 / 2520	2410
		3738 / 2580	3758 / 2620	2510
		3738 / 2680	3758 / 2720	2610
Li020	2034	4138 / 2380	4158 / 2420	1031+1031 2310
		4138 / 2480	4158 / 2520	2410



^{*)} Floor installation has been taken into account with 40 mm extra height.


**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

4138 / 2580

4138 / 2680

4158 / 2620

4158 / 2720



ACCESSORIES

Handles: Liune standard, Luke, Line, Leo, Aune, Laura, Lyra, Luna

Locks: L1, L2, L3, L4, L10, L12, L13

Automation with a drive mechanism

feature: of your choice

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed)
- 3. covering jambs
- screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- installation guide

2510


2610

70, 95 or 120mm

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.







When you need a durable and long-lasting door leaf.

Liune's melamine door EFFECT is a cost-efficient solution, since it consists of fewer surface layers than the laminated doors. It is still a durable and sturdy door with a chipboard as the core layer.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	g Door leaf width x height mm
	SINGLE I	DOOR			
	Li06	610	1335 / 2130	1350 / 2170	631 2060
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
	Li09	910	1935 / 2130	1950 / 2170	931 2060
	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
E	DOUBLE	D00R			
9	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	_Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060
	*\ =\			and the first fit	

 $[\]ensuremath{^{\star}}\xspace$) Floor installation has been taken into account with 40 mm extra height.

ACCESSORIES


Handles:	Liune standard, Luke, Line, Leo, Aune, Laura, Lyra
Locks:	L1, L2, L4, L10, L12, L13
Locks:	L1, L2, L4, L10, L12, L13
Automation feature:	with a drive mechanism of your choice
Soft closer:	for 70–95 mm elements
THE LITTUE DELIVE	DV INCLUDES A COMPLETE DOO

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide

^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.





The latest addition to Liune is the DOOR40 collection. The light weight contributes to the cost-efficiency and the high-quality steel frame provides functionality to any space.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	Door leaf width x height mm
	SINGLE	DOOR			
Γ	_ LI06	610	1335 / 2130	1350 / 2170	631 2060
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
	Li09	910	1935 / 2130	1950 / 2170	931 2060
20 mm	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
<u>Š</u>	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
or 1,	DOUBLE	DOOR			
2	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
L	_ Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

*) Floor installation has been taken into account with 40 mm extra height.


ACCESSORIES

Handles:

Liune standard

- 1. complete partitioning wall element for the door
- 2. door leaf (single or double)
- 3. abutments, handle and push latch
- 4. covering jambs
- 5. screws for plaster boards and covering jambs
- 6. space for electrical conduit for electrical installations in 95 mm elements
- 7. installation guide



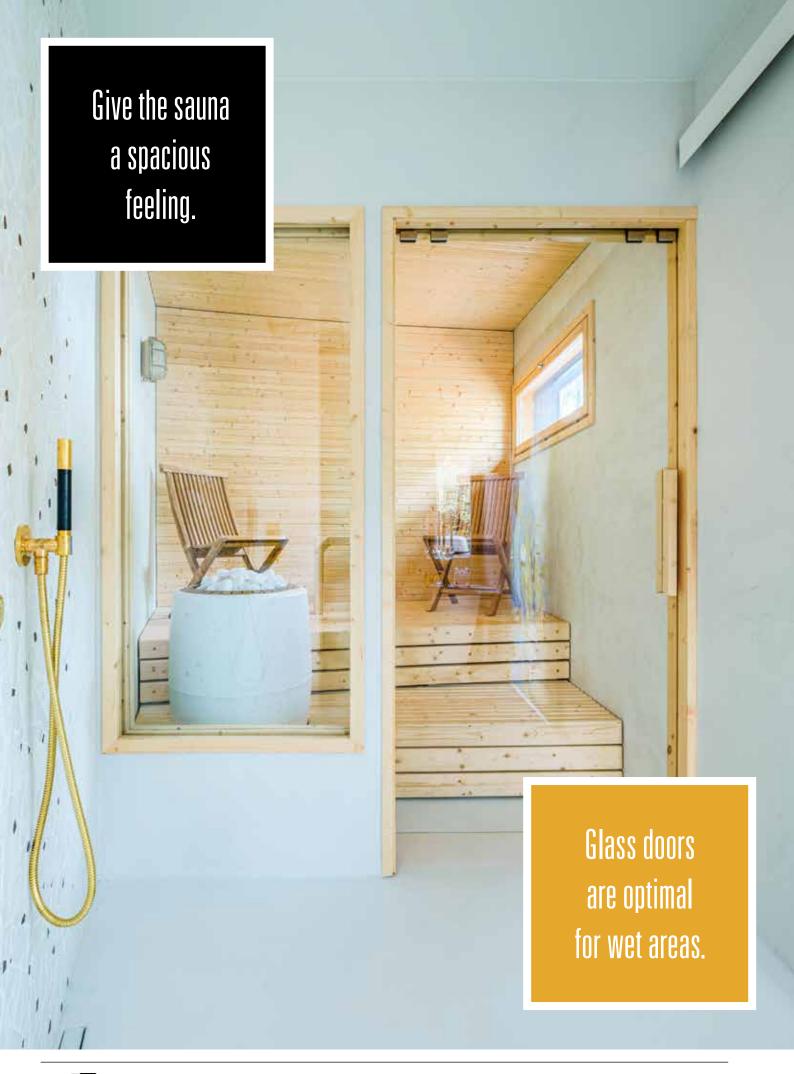






WET AREAS AND SAUNA DOORS




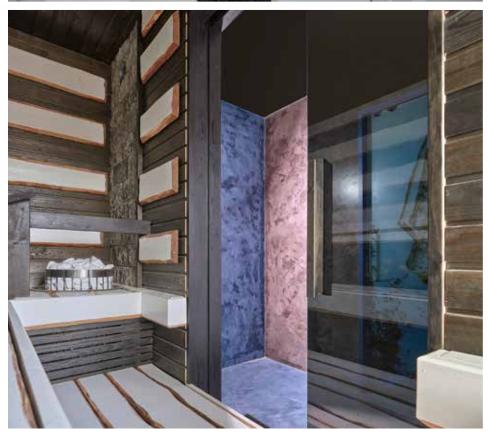



THEME D5 Moist Resistant Door





Daily routines – here we come! Laundry days, cleaning and morning routines run smoothly in the right environment. Liune doors are never in the way, which means that you can freely place the washing machine, cabinets and other utility room accessories wherever you want. Liune's D5 THEME **is** also perfectly suited for bathrooms and all other wet areas. THEME's covering jambs are also moisture resistant.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	g Door leaf width x height mm
	SINGLE	DOOR			
	Li06	610	1335 / 2130	1350 / 2170	631 2060
	Li07	710	1535 / 2130	1550 / 2170	731 2060
Ε	Li08	810	1735 / 2130	1750 / 2170	831 2060
20 mm	Li09	910	1935 / 2130	1950 / 2170	931 2060
12(Li010	1010	2135 / 2130	2150 / 2170	1031 2060
ō	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
, 95	DOUBLE	DOOR			
2	Lio10	1034	2138 / 2130	2158 / 2170	531+531 2060
	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
٦	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
шш	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
120	 Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
, P	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060
92	_Li022	2234	4538 / 2130	4558 / 2170	1131+1131 2060

*) Floor installation has been taken into account with 40 mm extra height.

ACCESSORIES

Locks:

Handles: Liune standard, Luke, Line, Leo,

Aune, Laura, Lyra, Luna

L1, L2, L3, L4, L10, L11, L12, L13

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- covering jambs
- 4. screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide






^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



HEAT D11 Sauna Door





Forget crowding and waiting! Create your own unique sauna with Liune. A modern and space saving solution for bathrooms and spa facilities with a sauna. Liune's HEAT sauna door comes with a beautiful crafted wooden handle.

	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	Door leaf width x height mm / glass
	SINGLE I	DOOR			
	Li07	610	1535 / 2130	1550 / 2170	831 1960
Ε	Li08	710	1735 / 2130	1750 / 2170	931 1960
mm (Li09	810	1935 / 2130	1950 / 2170	1031 1960
120	Li010	910	2135 / 2130	2150 / 2170	1131 1960
5	Li011	1010	2335 / 2130	2350 / 2170	1231 1960
95	Li012	1110	2535 / 2130	2550 / 2170	1331 1960

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



	Door size	opening* mm	Element width x height mm	Installation opening width x heigt* mm	Door leaf width x height mm / wood
	SINGLE I	DOOR			
	Li08	710	1735 / 2130	1750 / 2170	931 1960
1	Li09	810	1935 / 2130	1950 / 2170	1031 1960
5	Li010	910	2135 / 2130	2150 / 2170	1131 1960
•	Li011	1010	2335 / 2130	2350 / 2170	1231 1960

^{*)} Floor installation has been taken into account with 40 mm extra height.

DOOR OPTIONS:

opal, bright, dark smoke **Glass:**


birch veneered unprocessed wood

- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- installation guide



^{*)} Floor installation has been taken into account with 40 mm extra height.
**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

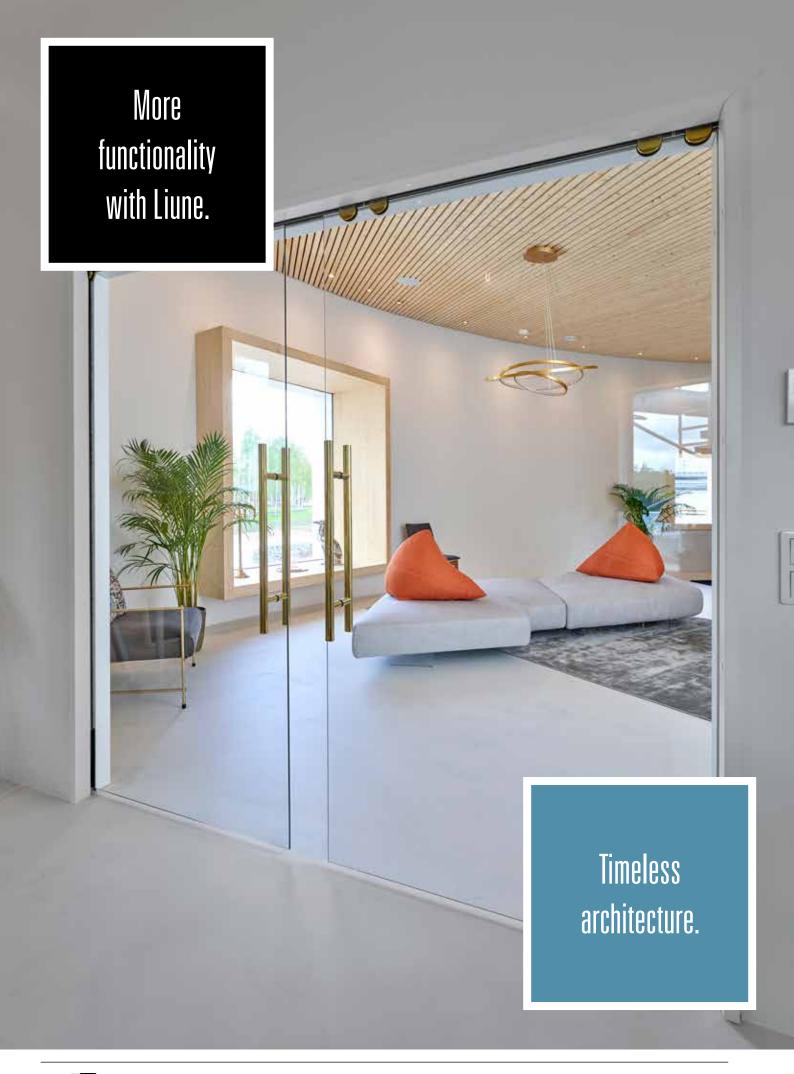





PANEL AND GLASS DOORS


NORDIC DESIGN





CLASSIC D4 Milled Panel door





Traditional ambiance or modern nuance? The milled panel door by Liune can be delivered to the customer with the desired panel option. The white colour creates a clean, pure and safe atmosphere and fits with all kinds of interiors.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height*	g Door leaf width x height mm			
	SINGLE I	DOOR						
	Li06	610	1335 / 2130	1350 / 2170	631 2060			
	Li07	710	1535 / 2130	1550 / 2170	731 2060			
_	Li08	810	1735 / 2130	1750 / 2170	831 2060			
m m	Li09	910	1935 / 2130	1950 / 2170	931 2060			
20	Li010	1010	2135 / 2130	2150 / 2170	1031 2060			
or 1	Li012	1210	2535 / 2130	2550 / 2170	1231 2060			
95 (DOUBLE DOOR							
70,	Lio10	1034	2138 / 2130	2158 / 2170	531+531 2060			
	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060			
ے	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060			
E E	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060			
20	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060			
, P	_Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060			
92	_Li022	2234	4538 / 2130	4558 / 2170	1131+1131 2060			

*) Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm

DOOR OPTIONS

ACCESSORIES

Handles:

Locks:

Automation

feature:

with a drive mechanism of your choice

for 70-95 mm elements

Traditional Classic, Style Classic,

Liune standard, Luke, Line, Leo, Aune, Laura, Lyra, Luna

Country House Classic

L1, L2, L3, L4, L13

- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed)
- 3. covering jambs
- screws for plaster boards and covering jambs 4.
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- installation guide








LIGHT D7 Glass Aperitured Door





Light, warmth and ease are the things that make a cosy home and a pleasant everyday life. A home built for functionality with beautiful details makes a captivating ensemble that gives energy to the everyday life. Play with the colors or enjoy a pure and bright white Liune LIGHT door that is easy to combine and match to any color in the interior decor. The number of light openings is optional, but the most common choice is 10- and 12-vented doors.





	Door size	Door opening* mm	Element width x height mm	Installation openin width x height* mm	g Door leaf width x height mm
	SINGLE I	DOOR			
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
	Li09	910	1935 / 2130	1950 / 2170	931 2060
шш	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
ח	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
95 or 120	DOUBLE	D00R			
5 01	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
9	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
70,	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

*) Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

DOOR OPTIONS

Glass: bright, opal, dark smoke

ACCESSORIES

Handles: Liune standard, Luke, Line, Leo,

Aune, Laura, Lyra, Luna

Locks: L1, L2, L3, L4, L13

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements


- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide





STAR D8 Glass Door





Let the light in. The beatiful three-panel glass door Liune STAR suits ideally to spacious rooms where the amount of light should be maximized. The different needs of your home can be taken into account by for example letting the light flood into the next room as well.





size	opening* mm	width x height mm	width x height*	width x height mm
SINGLE	D00R			
Li07	710	1535 / 2130	1550 / 2170	731 2060
Li08	810	1735 / 2130	1750 / 2170	831 2060
Li09	910	1935 / 2130	1950 / 2170	931 2060
Li010	1010	2135 / 2130	2150 / 2170	1031 2060
DOUBLE	D00R			
Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

*) Floor installation has been taken into account with 40 mm extra height.

DOOR OPTIONS

Glass: opal

ACCESSORIES

Handles: Liune standard

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70-95 mm elements

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR **PACKAGE READY TO BE INTEGRATED** WITH THE PARTITION WALL:

- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed)
- 3. covering jambs
- screws for plaster boards and covering jambs 4.
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide



70, 95 or 120 mm

^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.


It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.





TIME D9 Glass Door





Straight and streamlined. Integrated sliding partition doors bring serenity to your home. Thanks to the embedded handles the glass doors are locked completely inside the wall structure. We recommend the use of soft closers for door closing, with a soft closer the doors close silently and safely. It is possible to order a tempered laminated safety glass for day nurseries or day-care centers. The standard Liune Door comes with a tempered safety glass.





20 mm	Door size	Door opening* mm	Element width x height mm	Installation openin width x height* mm	g Door leaf width x heigl mm	ht
95, 120	SINGLE I	DOOR				
	Li07	710	1535 / 2130	1550 / 2170	731 206	0
70,	Li08	810	1735 / 2130	1750 / 2170	831 206	0
Ĺ	_Li09	910	1935 / 2130	1950 / 2170	931 206	0
mm	Li010	1010	2135 / 2130	2150 / 2170	1031 206	0
20 r	Li012	1210	2535 / 2130	2550 / 2170	1231 206	0
95, 12	DOUBLE	D00R				
	_Li012	1234	2538 / 2130	2558 / 2170	631+631 206	0
mm	Li014	1434	2938 / 2130	2958 / 2170	731+731 206	0
20 r	Li016	1634	3338 / 2130	3358 / 2170	831+831 206	0
7	Li018	1834	3738 / 2130	3758 / 2170	931+931 206	0
95	 Li020	2034	4138 / 2130	4158 / 2170	1031+1031 206	0
6,	Li022	2234	4538 / 2130	4558 / 2170	1131+1131 206	0

95,120 mm

DOOR OPTIONS

Glass: opal, clear, dark smoke

ACCESSORIES

Handles: Lara, Lily, Lucky, Livia, Lux

Locks: L5, L6, L9

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- covering jambs
- 4. screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide

^{*)} Floor installation has been taken into account with 40 mm extra height.


^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



REFLECT D10 Mirror Door





Planning and desingning your own home feels wonderful! Liune brings style to your home and adds wideness to it. Liune's REFLECT mirrored panel door creates a sensation of even more space. The mirror recess can also be filled, for example, with a white color. The handles and locks are freely selectable to match the interior decoration or to meet the needs of the space.



95 or 120 mm

70,



size	opening* mm	width x height mm	width x heigt* mm	width x height mm
SINGLE	D00R			
Li07	710	1535 / 2130	1550 / 2170	731 2060
Li08	810	1735 / 2130	1750 / 2170	831 2060
Li09	910	1935 / 2130	1950 / 2170	931 2060
Li010	1010	2135 / 2130	2150 / 2170	1031 2060
DOUBLE	D00R			
Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.
It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

ACCESSORIES

feature:

Handles: Liune standard, Luke, Line, Leo,

Aune, Laura, Luna, Lyra

Locks L1, L2, L4, L13

Automation with a drive mechanism

of your choice

Soft closer: for 70–95 mm elements

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide








STRIPE D23 Door with Milled Mdf-door Leaf





Stripe brings a dynamic and fun touch to the space! It is a stylish and eye-catching sleek smooth painted door with a milled pattern. Together with the Liune Door and the hinged doors of the Liune Space collection, the space forms a dynamic continuum in space and moment. There are several handle and lock options.





Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	g Door leaf width x height mm
SINGLE I	DOOR			
Li07	710	1535 / 2130	1550 / 2170	731 2060
Li08	810	1735 / 2130	1750 / 2170	831 2060
Li09	910	1935 / 2130	1950 / 2170	931 2060
Li010	1010	2135 / 2130	2150 / 2170	1031 2060
Li012	1210	2535 / 2130	2550 / 2170	1231 2060
DOUBLE	DOOR			
Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
1 i020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

DOOR LEAF, ELEMENTS AND FRAMES ORDERED SEPARATELY FROM THE ONLINE STORE.

ACCESSORIES

Handtag: Liune Standard, Luke, Line, Leo,

Aune, Laura, Lyra, Luna

Locks: L1, L2, L4, L13

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- 4. screws for plaster boards and covering jambs
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide




70, 95, 120 mm

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm



CITY D24 Massive door





Liune's trendy CITY LOFT is a white or alternatively black door model smoothed into an urban model, and when timelessness is desired, CITY is the right choice. The diagonal wood of the model is delivered as a separate piece and attached on the site. CITY is a high-quality massive wood frame door for dry interiors.





	Door size	Door opening* mm	Element width x height mm	Installation openin width x height* mm	ig Door width x m	height
	SINGLE I	DOOR				
	Li07	710	1535 / 2130	1550 / 2170	731	2060
	Li08	810	1735 / 2130	1750 / 2170	831	2060
E	Li09	910	1935 / 2130	1950 / 2170	931	2060
띹	Li010	1010	2135 / 2130	2150 / 2170	1031	2060
150	DOUBLE	D00R				
95 eller	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060
35	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060
ارد	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060
	_Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060

*) Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm

ACCESSORIES

Handtag: Liune standard

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- covering jambs
- 4. screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide


DOOR LEAF, ELEMENTS AND FRAMES ORDERED SEPARATELY FROM THE ONLINE STORE.






JOY D25 Door with Mirror in the Centre





Liune's trendy CITY LOFT is a white or alternatively black door model smoothed into an urban model, and when timelessness is desired, CITY is the right choice. The diagonal wood of the model is delivered as a separate piece and attached on the site. CITY is a high-quality massive wood frame door for dry interiors.



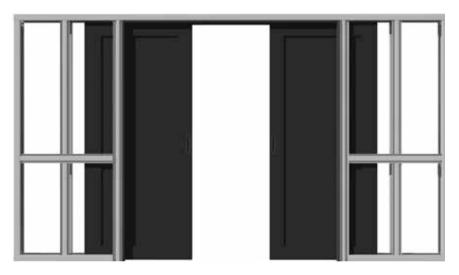

	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	g Door leaf width x height mm
	SINGLE I	DOOR			
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
	Li09	910	1935 / 2130	1950 / 2170	931 2060
	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
1	DOUBLE	D00R			
5	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
5	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
•	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	_Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

*) Floor installation has been taken into account with 40 mm extra height.

ACCESSORIES

Handles: Liune standard

Automation with a drive mechanism

feature: of your choice

Soft closer: for 70–95 mm elements

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- covering jambs
- 4. screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide

DOOR LEAF, ELEMENTS AND FRAMES ORDERED SEPARATELY FROM THE ONLINE STORE.




 $^{^{\}star\star})$ With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



SMILE D26 Door With Glass





The solid SMILE white door is equipped with stylish opal glass, which brings light and spaciousness. A stylish frame in either white or black runs around the door model's edges.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	g Door width x mn	height
	SINGLE I	DOOR				
	Li07	710	1535 / 2130	1550 / 2170	731	2060
	Li08	810	1735 / 2130	1750 / 2170	831	2060
_	Li09	910	1935 / 2130	1950 / 2170	931	2060
	Li010	1010	2135 / 2130	2150 / 2170	1031	2060
22	DOUBLE	D00R				
32,	Li012	1234	2538 / 2130	2558 / 2170	631+631	2060
5,	Li014	1434	2938 / 2130	2958 / 2170	731+731	2060
`	Li016	1634	3338 / 2130	3358 / 2170	831+831	2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931	2060
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031	2060

ACCESSORIES

Handles: Liune standard

Automation with a drive mechanism

of your choice feature:

Soft closer: for 70-95 mm elements

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed)
- covering jambs
- screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- installation guide 6.





DOOR LEAF, ELEMENTS AND FRAMES ORDERED SEPARATELY FROM THE ONLINE STORE

^{*)} Floor installation has been taken into account with 40 mm extra height.
**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening









SPECIAL DOORS


LIUNE NORDIC DESIGN

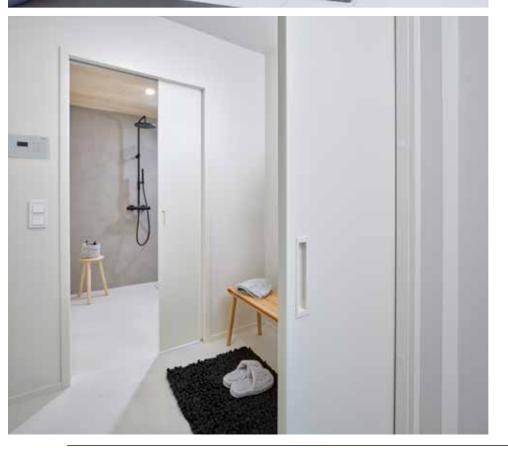



CALM D18 Acoustic Door

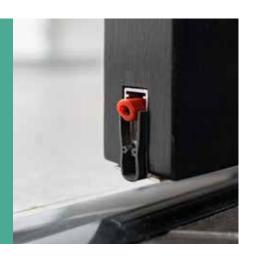



Fed up with doors that lack sound insulation? Liune doors insulate sound 30% better than the basic, unfilled hinged door. The automatic sealing threshold of Liune's CALM-door combines safety and comfort simply and unobtrusively. The beautiful white CALM-door is perfect for the discerning builder.



Sound insulation range 25 dB DnT, w (dB) 32

The door is specially manufactured from homogenous MDF -material. When the door is closed inside the counter jamb cover, a seal treshold falls automatically from the bottom of the door leaf closing the gap between it and the floor. Special orders can be made with doors and jamb covers in different colors or with different plating.

COVERING JAMBS

Door leaf

The covering jambs are specially manufactured with sound-proofing brushes. The standard color of the covering jambs are Liune white, NCS 0502-Y (RAL 9010), as is the door leaf. The gloss level is semi-matte.

ELEMENT

Inetallation opening

After installing plasterboards, and before the installation of the door leaf, acoustic wool is installed in the wall element. The acoustic wool is included in the delivery.

	size	opening* mm	width x height mm	width x height*	width x height mm
	SINGLE	DOOR			
_	Li07	710	1535 / 2130	1550 / 2170	731 2060
mm	Li08	810	1735 / 2130	1750 / 2170	831 2060
or 120	Li09	910	1935 / 2130	1950 / 2170	931 2060
\overline{z}	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
95 (Li012	1210	2535 / 2130	2550 / 2170	1231 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

Flement

ACCESSORIES


Handles: Liune standard, Luke Locks: L2, L3, L4, L12, L13

LIUNE SOLUTION READY FOR INSTALLATION: INTE-**GRATED INTO A PARTITION WALL:**

- complete partitioning wall element and wool
- dB-door, fastenings, threshold and fitting as well dBsound insulation
- 3. dB-covering jamb package
- acoustic wool, screws for plaster boards and covering jambs with brush strip
- space for electrical conduit for electrical installations
- installation guide and resident guidelines Insulate sound effectively


^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.
***) Sound Insulation class 25 dB, a lab-measurement of DnT, w (dB) 32

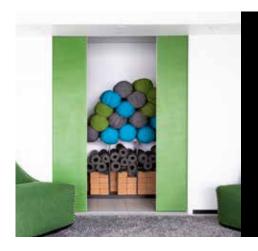

SAFE D22 Antibacterial Door





Highest quality combined with safety, LIUNE SAFE.

Liune SAFE is specially developed for premises where it is important to prevent the occurence or growth of microflora. Liune SAFE suits hospitals, health care centers, senior living facilities, kindergartens, schools, public spaces and homes, but also premises within the food industry and restaurants. The surface of Liune's SAFE door is wear resistant and the door has been designed to withstand the toughest use.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	Door leaf width x height mm
	SINGLE I	DOOR			
Г	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
_	Li09	910	1935 / 2130	1950 / 2170	931 2060
mm	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
20	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
or 1	DOUBLE	DOOR			
95	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
70,	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
.]	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

ACCESSORIES

Handles: Luke

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- 3. covering jambs
- screws for plaster boards and covering jambs
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide

THE DELIVERY OF LIUNE SAFE WITH ANTI BACTERIAL SURFACES

- Liune SAFE handels, white
- Liune SAFE covering jambs, white
- Liune SAFE door leaf, white



^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure. It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.








DECORATION DOORS

LUVE NORDIC DESIGN






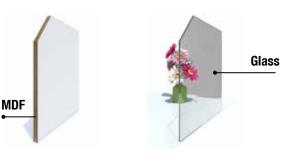


A curtain-like sliding door that you can hang on the wall.

The Surface LIUNE system includes a sliding door leaf and an installation package that fits the wall perfectly. The door and the panel for the hanging package can be tinted to match your interior design plans. The material package is delivered without door frames and coverstrips. This technical implementation of Liune guarantees a beautiful and light result.

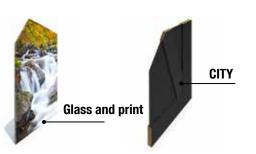
















Matt black hangin rail and brackets with black MDF- door.

	Door size	Door opening mm	Door MDF height	Door MDF extra high	Door glass height	Door glas extra high	Decoration slidingdoor height
	Li07	780	2135	2335	2100	2300	2135
	Li08	880	2135	2335	2100	2300	2135
**	Li09	980	2135	2335	2100	2300	2135
	Li010	1080	2135	2335	2100	2300	2135
	Li011	1180	2135	2335	2100	2300	
	Li012	1280	2135	2335	2100	2300	
***	Li013	1380	2135	2335	2100	2300	
	Li014	1480	2135	2335	2100	2300	

^{*}the door leaf can also be ordered in ncs-colours and the cover board in the same colour.

Liune | Decoration doors

DOOR OPTIONS

MDF white* 25 or 40 mm, opal glass, dark smoke, clear glass 8 mm, City

Handles glass: Lily, Lara, Lucky

Handles MDF: Liune Standard, Luke, Line, Leo,

Laura, Lyra

DELIVERY CONTENT INCLUDES


- 1. installation guide
- 2. fastening package of the sliding door, cover board
- 3. sliding door leaf
- hanging package of the sliding door

EXTRA UTRUSTNING

handle model in line with the object and the door

^{**}Decoration sliding door

^{***}Surface mounted sliding door with mechanism for KAPA-board

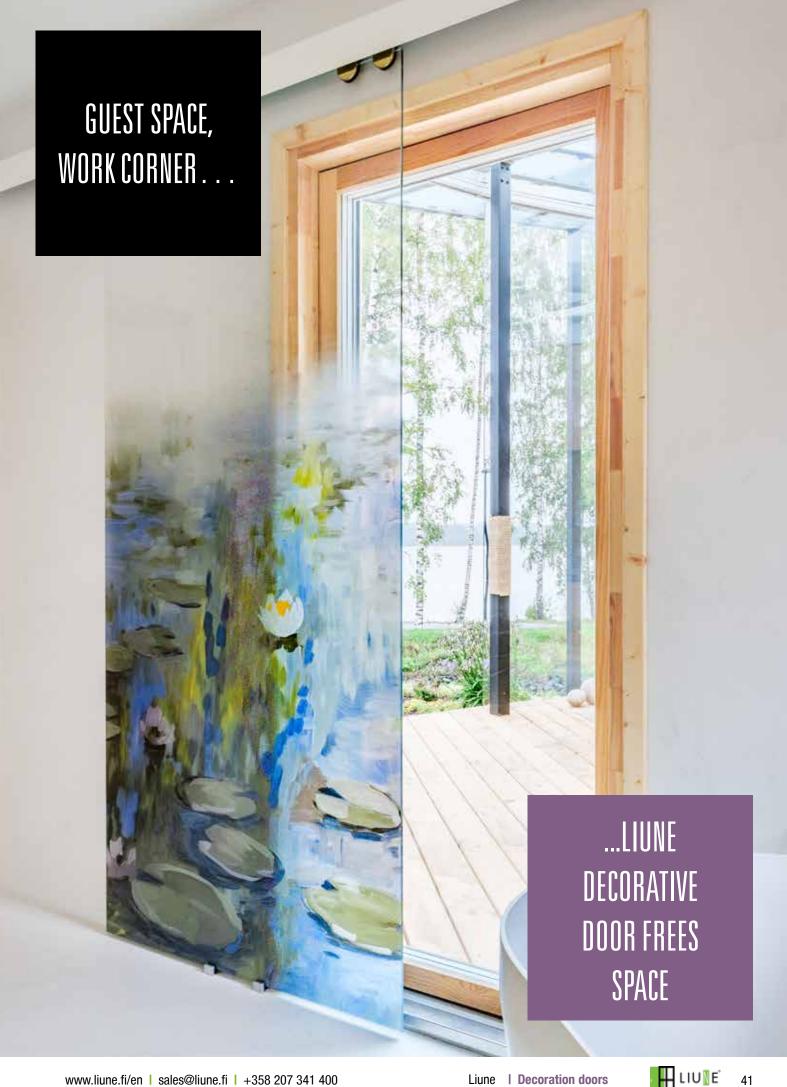





DESIGN DOORS








MY LIUNE D14 Design Door with Print





Wild and Free! Forget your old ideas about doors. This stunning Liune solution brings, not just more space, but also a new kind of freedom to the interior decoration. You can choose any image to be printed on the door, so let's get creative!





DOOR OPTIONS Door with print D9 Magnetic print door D2 Door models used with print D1, D5, D15, D17 **DATA REQUIREMENT**


Data Requirement is CMYK and the image format JPG, TIFF or EPS when saving the data. Size of the image must be 1:1 in size 300 dpi that the material is printable. The image must be in door size, e.g. 931 x 2060 mm.

ACCESSORIES

Handles and locks according to the door model

Select a picture for your door from the amazing My Door Collection, or send us your own captured moment that you'd like to save on the door.



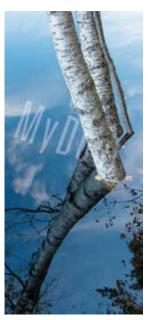




ART D20 by Johanna Oras







The Liune by Johanna Oras -door collection brings art to the every day life in a unique way. The deepest purpose of art is to create experiences and feelings, but art does not just have to hang on the wall, it can also be present at home in the decoration, textiles and even in suprising places.





	Door size	Door opening* mm	Element width x height mm	Installation openin width x height* mm	g Door leaf width x height mm
	SINGLE I	DOOR			
	 Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
	Li09	910	1935 / 2130	1950 / 2170	931 2060
шш	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
n O	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
.120	DOUBLE	D00R			
5 or	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
, 95	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
70,	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	_Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.

DOOR OPTIONS

Printed on a changeable magnetic sheet or directly on the surface of wooden or glass doors.

ACCESSORIES

Handles: Liune standard, Luke, Locks: L1, L2

Line, Leo, Aune, Laura

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE **PARTITION WALL:**


- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed)
- covering jambs
- screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- 6. installation guide

^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.



ART D20 by Lotta Sirén



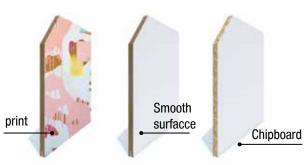

The Liune by Lotta Siren collection features 12 works of art that are suitable for both single-leaf and double doors. The painting method "acrylic pouring" used by Siren brings exciting nuances to the work with flowing and bubble-like shapes. The works of art are tastefully beautiful and bring a wonderful sparkle to the space.





	Door size	Door opening* mm	Element width x height mm	Installation opening width x height* mm	Door leaf width x height mm
	SINGLE I	DOOR			
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
	Li09	910	1935 / 2130	1950 / 2170	931 2060
mm	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
0 1	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
or 120 i	DOUBLE	D00R			
5 0	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
, 95	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
2	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	_Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

Liune | Design doors

DOOR OPTIONS

Printed on a changeable magnetic sheet or directly on the surface of wooden or glass doors.

ACCESSORIES

Handles:

Locks: L1, L2

Liune standard, Luke, Line, Leo, Aune, Laura

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE **PARTITION WALL:**

- complete partitioning wall element for the door 1.
- the door (abutments and fitting are pre-installed) 2.
- 3. covering jambs
- screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- installation guide


^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening



ART D20 by Nina Kellokoski



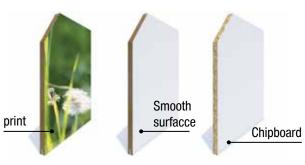

The Liune by Nina Kellokoski collection includes 11 photographic artworks that are suitable for both single-leaf and double doors. Phototherapeutic images perfectly combine mental states and moods, and their effect can also be perfectly utilized in home interior design solutions.





	Door size	Door opening*	Element width x height	Installation openin width x height*	g Door leaf width x height
		mm	mm	mm	mm
	SINGLE I	DOOR			
	Li07	710	1535 / 2130	1550 / 2170	731 2060
	Li08	810	1735 / 2130	1750 / 2170	831 2060
اء	Li09	910	1935 / 2130	1950 / 2170	931 2060
mm	Li010	1010	2135 / 2130	2150 / 2170	1031 2060
120	Li012	1210	2535 / 2130	2550 / 2170	1231 2060
95 eller 120	DOUBLE	D00R			
5 el	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060
9,	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060
70,	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060
	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060
	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060

^{*)} Floor installation has been taken into account with 40 mm extra height.

DOOR OPTIONS

Printed on a changeable magnetic sheet or directly on the surface of wooden or glass doors.

ACCESSORIES

Handles: Liune standard, Luke, Locks: L1, L2

Line, Leo, Aune, Laura

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE PARTITION WALL:

- 1. complete partitioning wall element for the door
- 2. the door (abutments and fitting are pre-installed)
- covering jambs
- 4. screws for plaster boards and covering jambs
- 5. space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- installation guide



^{**)} With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.


It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm












When you don't want to compromise on style. Liune's most popular door model is now available also in black. The door design ensures Liune quality by improving the accessibility and freeing the spaces. LIUNE BLACK is the high-quality and reliable choice made by the style-conscious designer. A black door, handles, fasteners and covering jambs.



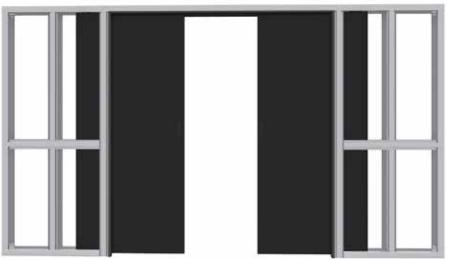

			Element width x height mm	Installation opening width x height* mm	g Door leaf width x height mm	
	SINGLE I	DOOR				
	Li06	610	1335 / 2130	1350 / 2170	631 2060	
	Li07	710	1535 / 2130	1550 / 2170	731 2060	
_	Li08	810	1735 / 2130	1750 / 2170	831 2060	
шш	Li09	910	1935 / 2130	1950 / 2170	931 2060	
20	Li010	1010	2135 / 2130	2150 / 2170	1031 2060	
or 1	Li012	1210	2535 / 2130	2550 / 2170	1231 2060	
95 (DOUBLE	D00R				
70,	Lio10	1034	2138 / 2130	2158 / 2170	531+531 2060	
	Li012	1234	2538 / 2130	2558 / 2170	631+631 2060	
_	Li014	1434	2938 / 2130	2958 / 2170	731+731 2060	
шш	Li016	1634	3338 / 2130	3358 / 2170	831+831 2060	
20	Li018	1834	3738 / 2130	3758 / 2170	931+931 2060	
or 1	Li020	2034	4138 / 2130	4158 / 2170	1031+1031 2060	
92	_Li022	2234	4538 / 2130	4558 / 2170	1131+1131 2060	

ACCESSORIES

Handles and locks according to the door model

THE LIUNE DELIVERY INCLUDES A COMPLETE DOOR PACKAGE READY TO BE INTEGRATED WITH THE **PARTITION WALL:**


- complete partitioning wall element for the door
- the door (abutments and fitting are pre-installed)
- covering jambs
- screws for plaster boards and covering jambs
- space for electrical conduit for electrical installations in 95 mm and 120 mm elements
- installation guide

^{*)} Floor installation has been taken into account with 40 mm extra height.

**) With embedded handles the door leaf can be fully concealed by sliding it into the wall structure.

It is opened again by pushing lightly on the side of the door leaf. Prodtruding door handles reduce the door opening by 100 mm.



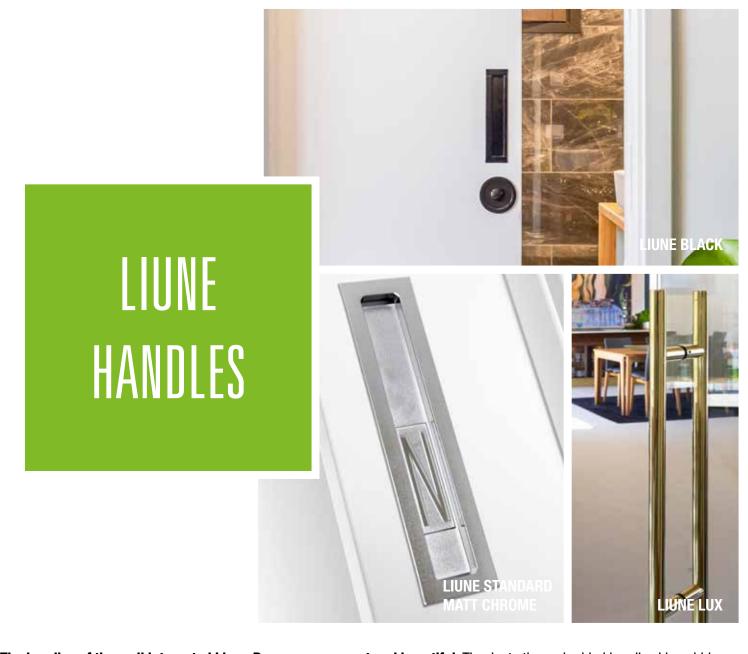

The handles of the wall integrated Liune Doors are compact and beautiful. Thanks to the embedded handles Liune hides completely inside the wall and the doorway is fully at your disposal. The protruding handles in the collection remain visible, taking approx. 10 cm from the door opening.





WOOD DOOR

LIUNE STANDARD

150 mm embedded

LUKE

matt chrome, white, black, chrome

144 mm embedded

silver, *color possibilities: all RAL- and

NCS-colors

LINE

LAURA

250 mm handle with legs,

chrome, black

400 mm handle with legs,

stainless steel

AUNE 60 mm embedded

chrome, matt chrome, black, white, *color possibilities:

all RAL- and NCS-colors

LYRA 60 mm round

stainless steel, black, gold

46 mm round silver, gold

50 mm embedded

square

GLASS DOOR

LILY

LUX

LIVIA

04 mm handle with legs

chrome

600 mm handle with legs

gold

60 mm round

silver

LUCKY

LE0

LUNA

LARA

LIUNE SAU A

60 mm round

stainless steel

60 mm round

black, gold, chrome

500 mm aspen



LUCKY



LE0 **CHROME**



LEO GOLD



LUNA



LARA **CHROME**



LARA BLACK



LARA GOLD



LYRA GOLD



LYRA BLACK



LYRA



LIVIA



AUNE* WHITE



AUNE BLACK



AUNE MATT CHROME



AUNE CHROME



Liune creates functional spaces. The pocket doors hide inside the wall, which means that they don't require space, they provide space. Liune Doors can also be complemented with a lock from our selection of Liune locks. The lock models are compatible with both glass and solid MDF -doors, and are selectable to fit the decor or the requirements for safety.

LIUNE LOCKS		WOOD I	DOOR		GLASS DOOR
		25 mm	32 mm	40 mm	8 mm
LOCK L1	bathroom lock, red-green, silver and gold	Χ			
LOCK L1	with Abloy-lock body 4249				
LOCK L2	white cover plate and the lock body 4960	Χ		Χ	
LOCK L3	L3 iLoq Chrome Abloy lock body	Χ		Χ	
LOCK L4	pocket door lock by Liune, chrome, to a 95 and 120 mm element	Χ		Χ	
			Χ		
LOCK L4	with lock body			Χ	
LOCK L5	glass door lock with a key, stainless steel				X
LOCK L6	door lock with a knob, stainless steel				Χ
LOCK L8	magnetic lock; lock and converter for solid massive wood doors of 40 mm thick-			Χ	
	ness, allows code locking or electronic key for electronic access control (not incl.)	Χ			Χ
LOCK L9	Abloy-lock for glass door, stainless steel		Χ	Χ	
LOCK L10	Liune lock BLACK for pocket door, 95 mm and 120 mm	Χ		Χ	
LOCK 10	with lock body				
LOCK L11	bathroom-lock, chrome, embedded, red-white	Χ		Χ	
LOCK L11	with lock body		Χ		
LOCK L12	Liune lock for pocket door, stainless steel, to element of 95 mm and 120 mm	Χ		Χ	
LOCK L12	with lock body		Χ		
LOCK L13	Liune lock for pocket door, gold 95 mm and 120 mm element			Χ	
LOCK L13	with lock body				

*) L3, L5, L6 and L9 are protruding locks and take up 100mm of the free passage opening.















L3 GOLD

L4 CHROME L10 BLACK L12 STAINLESS STEEL

THE LOCKS DIAMETER IS 60MM AND INSTALLATION IS DONE WITH LOCKING SCREW FASTENING.







L3 iLoq BLACK



L3 iLoq STAINLESS STEEL



L2 ABLOY CHROME





L2 ABLOY STAINLESS STEEL

L2 ABLOY BLACK



ABLOY LOCK BODY AVAILABLE TO CHOOSE AS SHOWN IN ILOQ L3 OR L2.









L11 STAINLESS STEEL L11 CHROME L11 MATT CHROME

THE LOCKS DIAMETER IS 60MM AND INSTALLATION IS DONE WITH LOCKING SCREW FASTENING.













L1 GOLD **L1 SILVER L11 CHROME**

SLIM LOCKS FOR THE DOORS. THE LOCKS HAVE A DIAMETER OF 46MM AND ARE PRESSED ONTO THE DOOR.



L5 CHROME bathroom lock for glass door



L5 MATT CHROME



L9 STAINLESS STEEL serialization possible. See Iloq lock.



L6 MATT CHROME Key-operated locking system for glass door, Glass door chrome lock



L8

Electromagnetic lock. Meets high security requirements, use e.g. bank branches.





COVERING JAMBS. The covering jambs are always pre cut to fit the Liune Doors perfectly and together they create a stunning aesthetic result. You can choose individual jambs to suit each room by selecting the model, material and color.

LIUNE COVERING JAMBS

Smooth and beautiful basic jambs that are standard in Liune's deliveries, unless agreed otherwise.

SURFACE COVERING JAMBS

The surface covering jambs and slender, they also hide the boarding edges at once. No separate surface moulding is required. The covering jambs are pre cut to miter.

GLASS DOOR COVERING JAMBS

The shades of Liune's covering jambs for glass doors can be chosen to suit each door individually. Painted smooth white covering jambs are standard.

VENEERED AND TINTED COVERING JAMBS

The jambs are delivered on order with different wood veneers and shades.

OAK VENEER COVERING JAMBS

Beautiful classic oak veneer jambs that match the oak veneer door.

SAUNA DOOR COVERING JAMBS

The standard jambs for the sauna are made of thermal aspen. The jambs take into account the increased wall depth due to tiling on one side. Other dimensions and materials can be ordered separately for each site.

WET AREA COVERING JAMBS

Wet room paint-protected jambs for splash free spaces.

DESIGN COVERING JAMBS

Covering jambs made of untreated aspen, pinewood or birch.





Automatic D12

Electrical features can be ordered for all single and double door models D1, D2, D3, D4, D9, D10, D13, D14, D17, D20, D21. Door frames can be chosen freely. Element size in the automation is always 95 mm. Liune sliding door automation empowers perfect accessibility. The sliding door is programmed to operate at constant speed to assure safety desired. All automation machinery parts are ready-installed on the door slide rail. The Liune standard automation feature is a wall-mounted pushbutton. Remote control and motion sensor mechanisms are also available.

Door Closer

The door closer can be retrofitted to all doors. The door won't lock, but affixes lightly on the jamb cover of the counter frame and improves the sound technical functionality.



Soft Closer

The soft closer softens the closing of the door by slowing down the door's movement while closing. The soft closer closes the door silently into the counter jamb. The soft closer is is compatible with the 66 mm, 70 mm and 95 mm elements. The soft closer can be retrofitted to the element.



Liune Door Sound Insulation Values

Do	or model	Thickness mm	Rw (dB)	Frame (mm) 66-120 GN+66+GN	Frame (mm) EK+95+EK
D1	HOPE	40	28	Χ	
D2	STRENGHT	25	23	X	
D3	MAGIC	25	23	X	
D4	CLASSIC	25	23	X	
D5	THEME	25	23	X	
D6	MOUNTAIN	25	23	X	
D7	LIGHT	25	23	X	
D8	STAR	25	23	X	
D9	TIME	8	8	Χ	
D10	REFLECT	25	17	X	
D13	WAVE	8-40	with the door model		
D14	MY LIUNE	8-40	with the door model		
D15	SURFACE	8-40	-	no sound values	
D16	DESIGN	20-40	with the door model		
D17	EFFECT	25	22	X	
D18	CALM	25	32		X
D19	D00R40	32	23	X	
D20	ART	8-40	with the door model	X	
D21	BLACK	25	23	X	
D22	SAFE	25	23	X	
D23	STRIPE	25	23		
D24	CITY	32	22		
D25	JOY	32	22		
D26	SMILE	32	23	X	

The lab-tested timber door Rw 12 dB, by the traditional sliding door the sound values are not achieved at all. Tests: Helimäki Akustikot Oy (Acoustics).



POP-UP LATCH



- **1.** Free passage is obtained when the door is closed inside the wall. It closes by lightly pushing the edge of the door leaf at the handle height.
- 2. The door is released from within the wall and the handle is partly visible.
- **3.** By pulling the handle the door moves parallel with the wall. The door opens and closes in the same manner. All Liune Door models slide completely inside the wall provided that the door is equipped with an embedded handle. The sauna doors are delivered with protruding handles.







A Liune latch is embedded at handle height in the rear edge of all wooden doors already in the factory. The spring latch locks the door leaf inside the door element and helps the door to pop out from inside the wall when the door is closed. The Liune latch can be replaced if necessary by removing the covering jambs and the door leaf. In glass doors the Liune latch is placed on the top of the door.

LIUNE DOOR ABC

Liune Pocket Doors are easy to install both for do-it-yourself and professional builders. Follow the 5-step installation guide.



- 1. The Quick-frame element is assembled from two welded element parts.
- **→** the installation is quick and easy.
- 2. The partition wall frame is ready
- **→** the Liune element is lifted into place.
- 3. The base of the element is installed at the level of the finished floor surface.
- → fix the element.

- 4. The element is covered with plaster boards by using the included screws.
- the wall surface can now be coated.
- 5. The coating is done.
- → install the door leaf and the covering jambs with the included screws.

FOR ARCHITECTS AND DESIGNERS: LIUNE GDL OBJECT CAN BE FREELY DOWNLOADED TO ARCHICAD, REVIT AND AUTOCAD OBJECTS AT www.liune.fi/bim/en




THIS IS HOW YOU CHOOSE LIUNE

Frame Types of 70, 95 and 120 mm define the thickness of the frame structure. The size of the doorway frame type is selected on the basis of the intended use.

The free opening for Liune size Li08 is 810 mm.



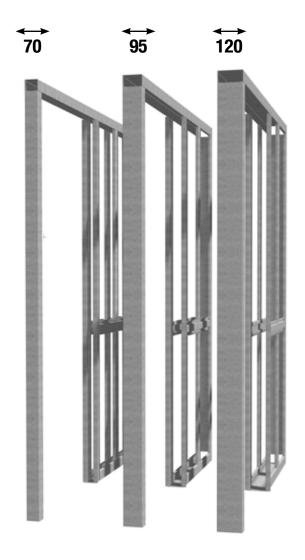

1. PARTITION WALL THICKNESS

Choose the element according to the frame depth 70 mm, 95 mm tai 120 mm

2. DOOR OPENING WIDTH

- Door width (single leaf) Li06, Li07, Li08, Li09, Li010, Li011, Li012
- Door width (double leaf) Li08, Li010, Li012, Li014, Li016, Li018, Li020, Li022

LIUNE ELEMENTS


The Liune partition door element is developed for professional builders and is the only pre-welded door element on the market. It is manufactured from CE-marked steel profiles and its indoor air quality classification is M1. Our element collection is extensive; we have designed elements to suit every particular space.



Frame depths starting from 70 mm and up. The elements include Liune quality standard rail.

Elements for every use, for glass doors or wet area elements, all of which include their required properties.

The bottom of the elements include a reinforcing steel profile and the doors steering fen is pre-installed.

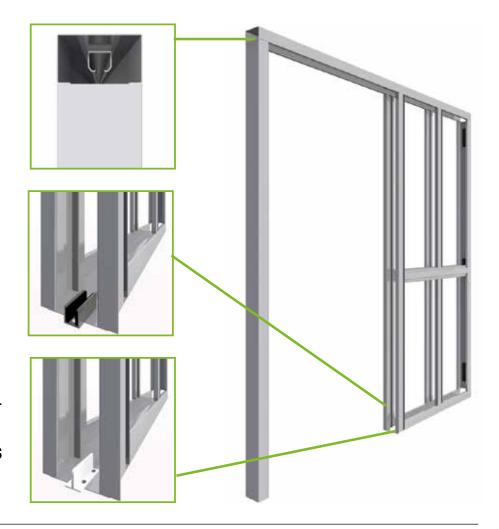



LIUNE ELEMENT

- spaces for electrical conduit in standard delivery in all frame depths of 95–120 mm
- the element is delivered pre-welded and assembled, and ready for installation. Only the sliding rail, door leaf and covering jambs need to be attached on site.



ELEMENT FOR WET AREA

- · spaces for electrical conduit
- wet area splash collecting runner in standard delivery
- the element is delivered pre-welded and assembled, and ready for installation. Only the sliding rail, wet area door leaf and covering jambs need to be attached on site.



GLASS ELEMENT

- · spaces for electrical conduit
- the element is delivered pre-welded and assembled, and ready for installation. Only the sliding rail, door leaf and covering jambs need to be attached on site.



SAUNA ELEMENT

*functional in wet spaces *pre-welded element ready to install



RENOVATION ELEMENT

- · spaces for electrical conduit
- renovation elements are supplied without the counter frame stud so that the space use for element installation is maximized




AUTOMATION ELEMENT

- in frame depths of 95–120 mm included in the standard delivery. Automation is switched on in connection with the other electrical work
- all parts of sliding door mechanism are already installed to the slide rail, the element is otherwise ready assembled for installation on the site.



CORNER ELEMENT

- Standard frame depth 95mm
- Standard places for electrical wiring in the element
- The element is pre-welded and the three (3) parts are attached together on site.

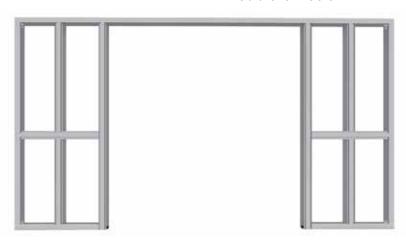

DOUBLE DOOR ELEMENT

- Standard frame depth 95mm
- Standard places for electrical wiring in the element
- The element is pre-welded and the three (3) parts are attached together on site.



LIUNE FOR PLUMBING AND FURNISHING

ELECTRICAL INSTALLATIONS

Liune's wet area element is prepared for electrical conduits already at the factory. The frame profile forms an electrical conduit tube where the cables can be installed safely.

PLUMBING

Plumbing can also be fitted into the Liune element if the frame depth is 120 mm. The most commonly used frame depth is 95 mm.

PARTITION WALL PANELLING

Boards intended for wet areas should be used in the wet room panelling according to the manufacturer's instruction. The door element can be panelled with wet area boards or cement based boards.



ELEMENT INSTALLATION BLOCKS

Accessory to facilitate the installation. 15 mm blocks for laminated floors and floor tiles, and 20 mm blocks for parquet floors.

FURNISHING ON THE ELEMENT

Furninshing can be installed on the Liune element by using special supports. The profiles can if needed be manufactured from thicker or stronger steel. With Liune everything is possible.

CHARACTERISTICS OF ELECTRICAL FITTINGS FOR VARIOUS ELEMENTS AND DOORS

FRAME THICKNESS IN mm	DOOR mm	PARTITION WALL SOCKET AT THE LEVEL OF ELEMENT
70	25 and 32	-
95	25	Embedded shallow sockets
95	32 and 40	Surface sockets
120	25	Embedded sockets
120	32 and 40	Embedded shallow sockets

DELIVERY PACKAGE

The delivery package includes a pocket type sliding door element ready for installation in the partition wall. The door leaf slides into the pocket and hides completely inside the wall, saving approximately 3 m2 of room and wall space per door.




SLIDING DOOR ELEMENT

Made of welded steel and ready to install, with an aluminun sliding rail on the top and a fixed steering rail on the bottom, compatible with the chosen Liune door leaf. Installation blocks can be ordered separately to facilitate the installation.



PARTITION DOOR

The door comes normally with the Liune latch, tab and handle already attached. The shade of the white Liune door is NCS 0502-Y and the gloss degree is semi gloss.



COVERING JAMBS

The covering jambs are white (NCS 0502-Y) and the gloss degree is semigloss. The standard dimension is always for one plasterboard per installation side. The covering jambs for sauna are made of aspen. Explore our jambs on page 56.



FASTENINGS

Ball bearing roller wheels and screws to fix the plaster boards to the element and to fix the door jamb covers. Frame plugs and soft seal for the door head. For door models D1 and D19 also the special fastenings and fittings.



PREPARED FOR ELECTRICAL CONDUITS

The element is prepared for electrical conduits. All Liune elements can be equipped with electricity, except for the 70 mm and the unvented sauna element.



INSTALLATION INSTRUCTIONS

For the element, which is installed in the wall framing stage, and the door leaf, which normally is installed in connection with the surface works.





Certified system since 2004.







Aulis Lundell Oy has been operating under the environmental managment system since 2004.



LIUNE DOOR Aulis Lundell Oy

Aulis Lundell Uy
Tel +358 207 341400
sales@liune.fi
www.liune.fi/sv